Framework for Improving Critical Infrastructure Cybersecurity

Version 1.1

National Institute of Standards and Technology

April 16, 2018

Note to Readers on the Update

Version 1.1 of this Cybersecurity Framework refines, clarifies, and enhances Version 1.0, which was issued in February 2014. It incorporates comments received on the two drafts of Version 1.1.

Version 1.1 is intended to be implemented by first-time and current Framework users. Current users should be able to implement Version 1.1 with minimal or no disruption; compatibility with Version 1.0 has been an explicit objective.

The following table summarizes the changes made between Version 1.0 and Version 1.1.

Table NTR-1 - Summary of changes between Framework Version 1.0 and Version 1.1.			
Update	Description of Update		
Clarified that terms like "compliance" can be confusing and mean something very different to various Framework stakeholders	Added clarity that the Framework has utility as a structure and language for organizing and expressing compliance with an organization's own cybersecurity requirements. However, the variety of ways in which the Framework can be used by an organization means that phrases like "compliance with the Framework" can be confusing.		
A new section on self- assessment	Added Section 4.0 <i>Self-Assessing Cybersecurity Risk with the</i> <i>Framework</i> to explain how the Framework can be used by organizations to understand and assess their cybersecurity risk, including the use of measurements.		
Greatly expanded explanation of using Framework for Cyber Supply Chain Risk Management purposes	An expanded Section 3.3 <i>Communicating Cybersecurity</i> <i>Requirements with Stakeholders</i> helps users better understand Cyber Supply Chain Risk Management (SCRM), while a new Section 3.4 Buying Decisions highlights use of the Framework in understanding risk associated with commercial off-the-shelf products and services. Additional Cyber SCRM criteria were added to the Implementation Tiers. Finally, a Supply Chain Risk Management Category, including multiple Subcategories, has been added to the Framework Core.		
Refinements to better account for authentication, authorization, and identity proofing	The language of the Access Control Category has been refined to better account for authentication, authorization, and identity proofing. This included adding one Subcategory each for Authentication and Identity Proofing. Also, the Category has been renamed to Identity Management and Access Control (PR.AC) to better represent the scope of the Category and corresponding Subcategories.		
Better explanation of the relationship between Implementation Tiers and Profiles	Added language to Section 3.2 <i>Establishing or Improving a</i> <i>Cybersecurity Program</i> on using Framework Tiers in Framework implementation. Added language to Framework Tiers to reflect integration of Framework considerations within organizational risk management programs. The Framework Tier concepts were also refined. Updated Figure 2.0 to include actions from the Framework Tiers.		

 Table NTR-1 - Summary of changes between Framework Version 1.0 and Version 1.1.

Coordinated Vulnerability	A Subcategory related to the vulnerability disclosure lifecycle was added.
Disclosure	

As with Version 1.0, Version 1.1 users are encouraged to customize the Framework to maximize individual organizational value.

Acknowledgements

This publication is the result of an ongoing collaborative effort involving industry, academia, and government. The National Institute of Standards and Technology (NIST) launched the project by convening private- and public-sector organizations and individuals in 2013. Published in 2014 and revised during 2017 and 2018, this *Framework for Improving Critical Infrastructure Cybersecurity* has relied upon eight public workshops, multiple Requests for Comment or Information, and thousands of direct interactions with stakeholders from across all sectors of the United States along with many sectors from around the world.

The impetus to change Version 1.0 and the changes that appear in this Version 1.1 were based on:

- Feedback and frequently asked questions to NIST since release of Framework Version 1.0;
- <u>105 responses</u> to the December 2015 request for information (RFI), <u>Views on the</u> <u>Framework for Improving Critical Infrastructure Cybersecurity;</u>
- Over<u>85 comments</u> on a December 5, 2017 proposed second draft of Version 1.1;
- Over <u>120 comments</u> on a January 10, 2017, proposed <u>first draft Version 1.1</u>; and
- Input from over 1,200 attendees at the <u>2016</u> and <u>2017</u> Framework workshops.

In addition, NIST previously released Version 1.0 of the Cybersecurity Framework with a companion document, *NIST Roadmap for Improving Critical Infrastructure Cybersecurity*. This Roadmap highlighted key "areas of improvement" for further development, alignment, and collaboration. Through private and public-sector efforts, some areas of improvement have advanced enough to be included in this Framework Version 1.1.

NIST acknowledges and thanks all of those who have contributed to this Framework.

Executive Summary

The United States depends on the reliable functioning of critical infrastructure. Cybersecurity threats exploit the increased complexity and connectivity of critical infrastructure systems, placing the Nation's security, economy, and public safety and health at risk. Similar to financial and reputational risks, cybersecurity risk affects a company's bottom line. It can drive up costs and affect revenue. It can harm an organization's ability to innovate and to gain and maintain customers. Cybersecurity can be an important and amplifying component of an organization's overall risk management.

To better address these risks, the Cybersecurity Enhancement Act of 2014¹ (CEA) updated the role of the National Institute of Standards and Technology (NIST) to include identifying and developing cybersecurity risk frameworks for voluntary use by critical infrastructure owners and operators. Through CEA, NIST must identify "a prioritized, flexible, repeatable, performance-based, and cost-effective approach, including information security measures and controls that may be voluntarily adopted by owners and operators of critical infrastructure to help them identify, assess, and manage cyber risks." This formalized NIST's previous work developing Framework Version 1.0 under Executive Order (EO) 13636, "Improving Critical Infrastructure Cybersecurity" (February 2013), and provided guidance for future Framework evolution. The Framework that was developed under EO 13636, and continues to evolve according to CEA, uses a common language to address and manage cybersecurity risk in a cost-effective way based on business and organizational needs without placing additional regulatory requirements on businesses.

The Framework focuses on using business drivers to guide cybersecurity activities and considering cybersecurity risks as part of the organization's risk management processes. The Framework consists of three parts: the Framework Core, the Implementation Tiers, and the Framework Profiles. The Framework Core is a set of cybersecurity activities, outcomes, and informative references that are common across sectors and critical infrastructure. Elements of the Core provide detailed guidance for developing individual organizational Profiles. Through use of Profiles, the Framework will help an organization to align and prioritize its cybersecurity activities with its business/mission requirements, risk tolerances, and resources. The Tiers provide a mechanism for organizations to view and understand the characteristics of their approach to managing cybersecurity risk, which will help in prioritizing and achieving cybersecurity objectives.

While this document was developed to improve cybersecurity risk management in critical infrastructure, the Framework can be used by organizations in any sector or community. The Framework enables organizations – regardless of size, degree of cybersecurity risk, or cybersecurity sophistication – to apply the principles and best practices of risk management to improving security and resilience.

The Framework provides a common organizing structure for multiple approaches to cybersecurity by assembling standards, guidelines, and practices that are working effectively today. Moreover, because it references globally recognized standards for cybersecurity, the

¹See 15 U.S.C. § 272(e)(1)(A)(i). The Cybersecurity Enhancement Act of 2014 (S.1353) became public law 113-274 on December 18, 2014 and may be found at: <u>https://www.congress.gov/bill/113th-congress/senate-bill/1353/text</u>.

Framework can serve as a model for international cooperation on strengthening cybersecurity in critical infrastructure as well as other sectors and communities.

The Framework offers a flexible way to address cybersecurity, including cybersecurity's effect on physical, cyber, and people dimensions. It is applicable to organizations relying on technology, whether their cybersecurity focus is primarily on information technology (IT), industrial control systems (ICS), cyber-physical systems (CPS), or connected devices more generally, including the Internet of Things (IoT). The Framework can assist organizations in addressing cybersecurity as it affects the privacy of customers, employees, and other parties. Additionally, the Framework's outcomes serve as targets for workforce development and evolution activities.

The Framework is not a one-size-fits-all approach to managing cybersecurity risk for critical infrastructure. Organizations will continue to have unique risks – different threats, different vulnerabilities, different risk tolerances. They also will vary in how they customize practices described in the Framework. Organizations can determine activities that are important to critical service delivery and can prioritize investments to maximize the impact of each dollar spent. Ultimately, the Framework is aimed at reducing and better managing cybersecurity risks.

To account for the unique cybersecurity needs of organizations, there are a wide variety of ways to use the Framework. The decision about how to apply it is left to the implementing organization. For example, one organization may choose to use the Framework Implementation Tiers to articulate envisioned risk management practices. Another organization may use the Framework's five Functions to analyze its entire risk management portfolio; that analysis may or may not rely on more detailed companion guidance, such as controls catalogs. There sometimes is discussion about "compliance" with the Framework, and the Framework has utility as a structure and language for organizing and expressing compliance with an organization's own cybersecurity requirements. Nevertheless, the variety of ways in which the Framework can be used by an organization means that phrases like "compliance with the Framework" can be confusing and mean something very different to various stakeholders.

The Framework is a living document and will continue to be updated and improved as industry provides feedback on implementation. NIST will continue coordinating with the private sector and government agencies at all levels. As the Framework is put into greater practice, additional lessons learned will be integrated into future versions. This will ensure the Framework is meeting the needs of critical infrastructure owners and operators in a dynamic and challenging environment of new threats, risks, and solutions.

Expanded and more effective use and sharing of best practices of this voluntary Framework are the next steps to improve the cybersecurity of our Nation's critical infrastructure – providing evolving guidance for individual organizations while increasing the cybersecurity posture of the Nation's critical infrastructure and the broader economy and society.

Table of Contents

Note to	o Readers on the Update	ii
Ackno	owledgements	iv
Execut	tive Summary	V
1.0	Framework Introduction	1
2.0	Framework Basics	6
3.0	How to Use the Framework	13
4.0	Self-Assessing Cybersecurity Risk with the Framework	20
Appen	ndix A: Framework Core	22
Appen	ndix B: Glossary	45
Appen	ndix C: Acronyms	48

List of Figures

Figure 1: Framework Core Structure	6
Figure 2: Notional Information and Decision Flows within an Organization	12
Figure 3: Cyber Supply Chain Relationships	17

List of Tables

Table 1: Function and Category Unique Identifiers	23
Table 2: Framework Core	24
Table 3: Framework Glossary	45

1.0 Framework Introduction

The United States depends on the reliable functioning of its critical infrastructure. Cybersecurity threats exploit the increased complexity and connectivity of critical infrastructure systems, placing the Nation's security, economy, and public safety and health at risk. Similar to financial and reputational risks, cybersecurity risk affects a company's bottom line. It can drive up costs and affect revenue. It can harm an organization's ability to innovate and to gain and maintain customers. Cybersecurity can be an important and amplifying component of an organization's overall risk management.

To strengthen the resilience of this infrastructure, the Cybersecurity Enhancement Act of 2014² (CEA) updated the role of the National Institute of Standards and Technology (NIST) to "facilitate and support the development of" cybersecurity risk frameworks. Through CEA, NIST must identify "a prioritized, flexible, repeatable, performance-based, and cost-effective approach, including information security measures and controls that may be voluntarily adopted by owners and operators of critical infrastructure to help them identify, assess, and manage cyber risks." This formalized NIST's previous work developing Framework Version 1.0 under Executive Order 13636, "Improving Critical Infrastructure Cybersecurity," issued in February 2013³, and provided guidance for future Framework evolution.

Critical infrastructure⁴ is defined in the U.S. Patriot Act of 2001⁵ as "systems and assets, whether physical or virtual, so vital to the United States that the incapacity or destruction of such systems and assets would have a debilitating impact on security, national economic security, national public health or safety, or any combination of those matters." Due to the increasing pressures from external and internal threats, organizations responsible for critical infrastructure need to have a consistent and iterative approach to identifying, assessing, and managing cybersecurity risk. This approach is necessary regardless of an organization's size, threat exposure, or cybersecurity sophistication today.

The critical infrastructure community includes public and private owners and operators, and other entities with a role in securing the Nation's infrastructure. Members of each critical infrastructure sector perform functions that are supported by the broad category of technology, including information technology (IT), industrial control systems (ICS), cyber-physical systems (CPS), and connected devices more generally, including the Internet of Things (IoT). This reliance on technology, communication, and interconnectivity has changed and expanded the potential vulnerabilities and increased potential risk to operations. For example, as technology and the data it produces and processes are increasingly used to deliver critical services and support business/mission decisions, the potential impacts of a cybersecurity incident on an

² See 15 U.S.C. § 272(e)(1)(A)(i). The Cybersecurity Enhancement Act of 2014 (S.1353) became public law 113-274 on December 18, 2014 and may be found at: <u>https://www.congress.gov/bill/113th-congress/senatebill/1353/text</u>.

³ Executive Order no. 13636, *Improving Critical Infrastructure Cybersecurity*, DCPD-201300091, February 12, 2013. <u>https://www.gpo.gov/fdsys/pkg/CFR-2014-title3-vol1/pdf/CFR-2014-title3-vol1-eo13636.pdf</u>

⁴ The Department of Homeland Security (DHS) Critical Infrastructure program provides a listing of the sectors and their associated critical functions and value chains. <u>http://www.dhs.gov/critical-infrastructure-sectors</u>

⁵ See 42 U.S.C. § 5195c(e)). The U.S. Patriot Act of 2001 (H.R.3162) became public law 107-56 on October 26, 2001 and may be found at: <u>https://www.congress.gov/bill/107th-congress/house-bill/3162</u>

organization, the health and safety of individuals, the environment, communities, and the broader economy and society should be considered.

To manage cybersecurity risks, a clear understanding of the organization's business drivers and security considerations specific to its use of technology is required. Because each organization's risks, priorities, and systems are unique, the tools and methods used to achieve the outcomes described by the Framework will vary.

Recognizing the role that the protection of privacy and civil liberties plays in creating greater public trust, the Framework includes a methodology to protect individual privacy and civil liberties when critical infrastructure organizations conduct cybersecurity activities. Many organizations already have processes for addressing privacy and civil liberties. The methodology is designed to complement such processes and provide guidance to facilitate privacy risk management consistent with an organization's approach to cybersecurity risk management. Integrating privacy and cybersecurity can benefit organizations by increasing customer confidence, enabling more standardized sharing of information, and simplifying operations across legal regimes.

The Framework remains effective and supports technical innovation because it is technology neutral, while also referencing a variety of existing standards, guidelines, and practices that evolve with technology. By relying on those global standards, guidelines, and practices developed, managed, and updated by industry, the tools and methods available to achieve the Framework outcomes will scale across borders, acknowledge the global nature of cybersecurity risks, and evolve with technological advances and business requirements. The use of existing and emerging standards will enable economies of scale and drive the development of effective products, services, and practices that meet identified market needs. Market competition also promotes faster diffusion of these technologies and practices and realization of many benefits by the stakeholders in these sectors.

Building from those standards, guidelines, and practices, the Framework provides a common taxonomy and mechanism for organizations to:

- 1) Describe their current cybersecurity posture;
- 2) Describe their target state for cybersecurity;
- 3) Identify and prioritize opportunities for improvement within the context of a continuous and repeatable process;
- 4) Assess progress toward the target state;
- 5) Communicate among internal and external stakeholders about cybersecurity risk.

The Framework is not a one-size-fits-all approach to managing cybersecurity risk for critical infrastructure. Organizations will continue to have unique risks – different threats, different vulnerabilities, different risk tolerances. They also will vary in how they customize practices described in the Framework. Organizations can determine activities that are important to critical service delivery and can prioritize investments to maximize the impact of each dollar spent. Ultimately, the Framework is aimed at reducing and better managing cybersecurity risks.

To account for the unique cybersecurity needs of organizations, there are a wide variety of ways to use the Framework. The decision about how to apply it is left to the implementing organization. For example, one organization may choose to use the Framework Implementation Tiers to articulate envisioned risk management practices. Another organization may use the Framework's five Functions to analyze its entire risk management portfolio; that analysis may or may not rely on more detailed companion guidance, such as controls catalogs. There sometimes is discussion about "compliance" with the Framework, and the Framework has utility as a structure and language for organizing and expressing compliance with an organization's own cybersecurity requirements. Nevertheless, the variety of ways in which the Framework can be used by an organization means that phrases like "compliance with the Framework" can be confusing and mean something very different to various stakeholders.

The Framework complements, and does not replace, an organization's risk management process and cybersecurity program. The organization can use its current processes and leverage the Framework to identify opportunities to strengthen and communicate its management of cybersecurity risk while aligning with industry practices. Alternatively, an organization without an existing cybersecurity program can use the Framework as a reference to establish one.

While the Framework has been developed to improve cybersecurity risk management as it relates to critical infrastructure, it can be used by organizations in any sector of the economy or society. It is intended to be useful to companies, government agencies, and not-for-profit organizations regardless of their focus or size. The common taxonomy of standards, guidelines, and practices that it provides also is not country-specific. Organizations outside the United States may also use the Framework to strengthen their own cybersecurity efforts, and the Framework can contribute to developing a common language for international cooperation on critical infrastructure cybersecurity.

1.1 Overview of the Framework

The Framework is a risk-based approach to managing cybersecurity risk, and is composed of three parts: the Framework Core, the Framework Implementation Tiers, and the Framework Profiles. Each Framework component reinforces the connection between business/mission drivers and cybersecurity activities. These components are explained below.

- The *Framework Core* is a set of cybersecurity activities, desired outcomes, and applicable references that are common across critical infrastructure sectors. The Core presents industry standards, guidelines, and practices in a manner that allows for communication of cybersecurity activities and outcomes across the organization from the executive level to the implementation/operations level. The Framework Core consists of five concurrent and continuous Functions—Identify, Protect, Detect, Respond, Recover. When considered together, these Functions provide a high-level, strategic view of the lifecycle of an organization's management of cybersecurity risk. The Framework Core then identifies underlying key Categories and Subcategories which are discrete outcomes for each Function, and matches them with example Informative References such as existing standards, guidelines, and practices for each Subcategory.
- <u>Framework Implementation Tiers</u> ("Tiers") provide context on how an organization views cybersecurity risk and the processes in place to manage that risk. Tiers describe the degree to which an organization's cybersecurity risk management practices exhibit the

characteristics defined in the Framework (e.g., risk and threat aware, repeatable, and adaptive). The Tiers characterize an organization's practices over a range, from Partial (Tier 1) to Adaptive (Tier 4). These Tiers reflect a progression from informal, reactive responses to approaches that are agile and risk-informed. During the Tier selection process, an organization should consider its current risk management practices, threat environment, legal and regulatory requirements, business/mission objectives, and organizational constraints.

• A *Framework Profile* ("Profile") represents the outcomes based on business needs that an organization has selected from the Framework Categories and Subcategories. The Profile can be characterized as the alignment of standards, guidelines, and practices to the Framework Core in a particular implementation scenario. Profiles can be used to identify opportunities for improving cybersecurity posture by comparing a "Current" Profile (the "as is" state) with a "Target" Profile (the "to be" state). To develop a Profile, an organization can review all of the Categories and Subcategories and, based on business/mission drivers and a risk assessment, determine which are most important; it can add Categories and Subcategories as needed to address the organization's risks. The Current Profile can then be used to support prioritization and measurement of progress toward the Target Profile, while factoring in other business needs including cost-effectiveness and innovation. Profiles can be used to conduct self-assessments and communicate within an organization or between organizations.

1.2 Risk Management and the Cybersecurity Framework

Risk management is the ongoing process of identifying, assessing, and responding to risk. To manage risk, organizations should understand the likelihood that an event will occur and the potential resulting impacts. With this information, organizations can determine the acceptable level of risk for achieving their organizational objectives and can express this as their risk tolerance.

With an understanding of risk tolerance, organizations can prioritize cybersecurity activities, enabling organizations to make informed decisions about cybersecurity expenditures. Implementation of risk management programs offers organizations the ability to quantify and communicate adjustments to their cybersecurity programs. Organizations may choose to handle risk in different ways, including mitigating the risk, transferring the risk, avoiding the risk, or accepting the risk, depending on the potential impact to the delivery of critical services. The Framework uses risk management processes to enable organizations to inform and prioritize decisions regarding cybersecurity. It supports recurring risk assessments and validation of business drivers to help organizations select target states for cybersecurity activities that reflect desired outcomes. Thus, the Framework gives organizations the ability to dynamically select and direct improvement in cybersecurity risk management for the IT and ICS environments.

The Framework is adaptive to provide a flexible and risk-based implementation that can be used with a broad array of cybersecurity risk management processes. Examples of cybersecurity risk management processes include International Organization for Standardization (ISO)

31000:2009⁶, ISO/International Electrotechnical Commission (IEC) 27005:2011⁷, NIST Special Publication (SP) 800-39⁸, and the *Electricity Subsector Cybersecurity Risk Management Process* (RMP) guideline⁹.

1.3 Document Overview

The remainder of this document contains the following sections and appendices:

- <u>Section 2</u> describes the Framework components: the Framework Core, the Tiers, and the Profiles.
- <u>Section 3</u> presents examples of how the Framework can be used.
- <u>Section 4</u> describes how to use the Framework for self-assessing and demonstrating cybersecurity through measurements.
- <u>Appendix A</u> presents the Framework Core in a tabular format: the Functions, Categories, Subcategories, and Informative References.
- <u>Appendix B</u> contains a glossary of selected terms.
- <u>Appendix C</u> lists acronyms used in this document.

⁶ International Organization for Standardization, *Risk management – Principles and guidelines*, ISO 31000:2009, 2009. <u>http://www.iso.org/iso/home/standards/iso31000.htm</u>

⁷ International Organization for Standardization/International Electrotechnical Commission, Information technology – Security techniques – Information security risk management, ISO/IEC 27005:2011, 2011. https://www.iso.org/standard/56742.html

⁸ Joint Task Force Transformation Initiative, *Managing Information Security Risk: Organization, Mission, and Information System View*, NIST Special Publication 800-39, March 2011. <u>https://doi.org/10.6028/NIST.SP.800-39</u>

⁹ U.S. Department of Energy, *Electricity Subsector Cybersecurity Risk Management Process*, DOE/OE-0003, May 2012. <u>https://energy.gov/sites/prod/files/Cybersecurity Risk Management Process Guideline - Final - May 2012.pdf</u>

2.0 Framework Basics

The Framework provides a common language for understanding, managing, and expressing cybersecurity risk to internal and external stakeholders. It can be used to help identify and prioritize actions for reducing cybersecurity risk, and it is a tool for aligning policy, business, and technological approaches to managing that risk. It can be used to manage cybersecurity risk across entire organizations or it can be focused on the delivery of critical services within an organization. Different types of entities – including sector coordinating structures, associations, and organizations – can use the Framework for different purposes, including the creation of common Profiles.

2.1 Framework Core

The *Framework Core* provides a set of activities to achieve specific cybersecurity *outcomes*, and references examples of guidance to achieve those outcomes. The Core is not a checklist of actions to perform. It presents key cybersecurity outcomes identified by stakeholders as helpful in managing cybersecurity risk. The Core comprises four elements: Functions, Categories, Subcategories, and Informative References, depicted in **Figure 1**:

IONS	IDENTIFY D		CATEGORIES	SUBCATEGORIES	INFORMATIVE REFERENCES
L	protect PR		CATEGORIES	SUBCATEGORIES	INFORMATIVE REFERENCES
DRK FUN	detect DE	~	CATEGORIES	SUBCATEGORIES	INFORMATIVE REFERENCES
FRAMEWORK	respond RS		CATEGORIES	SUBCATEGORIES	INFORMATIVE REFERENCES
FR	recover RC		CATEGORIES	SUBCATEGORIES	INFORMATIVE REFERENCES

Figure 1: Framework Core Structure

The Framework Core elements work together as follows:

• **Functions** organize basic cybersecurity activities at their highest level. These Functions are Identify, Protect, Detect, Respond, and Recover. They aid an organization in expressing its management of cybersecurity risk by organizing information, enabling risk management decisions, addressing threats, and improving by learning from previous activities. The Functions also align with existing methodologies for incident management and help show the impact of investments in cybersecurity. For example, investments in planning and exercises support timely response and recovery actions, resulting in reduced impact to the delivery of services.

- **Categories** are the subdivisions of a Function into groups of cybersecurity outcomes closely tied to programmatic needs and particular activities. Examples of Categories include "Asset Management," "Identity Management and Access Control," and "Detection Processes."
- **Subcategories** further divide a Category into specific outcomes of technical and/or management activities. They provide a set of results that, while not exhaustive, help support achievement of the outcomes in each Category. Examples of Subcategories include "External information systems are catalogued," "Data-at-rest is protected," and "Notifications from detection systems are investigated."
- **Informative References** are specific sections of standards, guidelines, and practices common among critical infrastructure sectors that illustrate a method to achieve the outcomes associated with each Subcategory. The Informative References presented in the Framework Core are illustrative and not exhaustive. They are based upon cross-sector guidance most frequently referenced during the Framework development process.

The five Framework Core Functions are defined below. These Functions are not intended to form a serial path or lead to a static desired end state. Rather, the Functions should be performed concurrently and continuously to form an operational culture that addresses the dynamic cybersecurity risk. See <u>Appendix A</u> for the complete Framework Core listing.

• **Identify** – Develop an organizational understanding to manage cybersecurity risk to systems, people, assets, data, and capabilities.

The activities in the Identify Function are foundational for effective use of the Framework. Understanding the business context, the resources that support critical functions, and the related cybersecurity risks enables an organization to focus and prioritize its efforts, consistent with its risk management strategy and business needs. Examples of outcome Categories within this Function include: Asset Management; Business Environment; Governance; Risk Assessment; and Risk Management Strategy.

• **Protect** – Develop and implement appropriate safeguards to ensure delivery of critical services.

The Protect Function supports the ability to limit or contain the impact of a potential cybersecurity event. Examples of outcome Categories within this Function include: Identity Management and Access Control; Awareness and Training; Data Security; Information Protection Processes and Procedures; Maintenance; and Protective Technology.

• **Detect** – Develop and implement appropriate activities to identify the occurrence of a cybersecurity event.

The Detect Function enables timely discovery of cybersecurity events. Examples of outcome Categories within this Function include: Anomalies and Events; Security Continuous Monitoring; and Detection Processes.

• **Respond** – Develop and implement appropriate activities to take action regarding a detected cybersecurity incident.

The Respond Function supports the ability to contain the impact of a potential cybersecurity incident. Examples of outcome Categories within this Function include: Response Planning; Communications; Analysis; Mitigation; and Improvements.

• **Recover** – Develop and implement appropriate activities to maintain plans for resilience and to restore any capabilities or services that were impaired due to a cybersecurity incident.

The Recover Function supports timely recovery to normal operations to reduce the impact from a cybersecurity incident. Examples of outcome Categories within this Function include: Recovery Planning; Improvements; and Communications.

2.2 Framework Implementation Tiers

The Framework Implementation Tiers ("Tiers") provide context on how an organization views cybersecurity risk and the processes in place to manage that risk. Ranging from Partial (Tier 1) to Adaptive (Tier 4), Tiers describe an increasing degree of rigor and sophistication in cybersecurity risk management practices. They help determine the extent to which cybersecurity risk management is informed by business needs and is integrated into an organization's overall risk management practices. Risk management considerations include many aspects of cybersecurity, including the degree to which privacy and civil liberties considerations are integrated into an organization's management of cybersecurity risk and potential risk responses.

The Tier selection process considers an organization's current risk management practices, threat environment, legal and regulatory requirements, information sharing practices, business/mission objectives, supply chain cybersecurity requirements, and organizational constraints. Organizations should determine the desired Tier, ensuring that the selected level meets the organizational goals, is feasible to implement, and reduces cybersecurity risk to critical assets and resources to levels acceptable to the organization. Organizations should consider leveraging external guidance obtained from Federal government departments and agencies, Information Sharing and Analysis Centers (ISACs), Information Sharing and Analysis Organizations (ISAOs), existing maturity models, or other sources to assist in determining their desired tier.

While organizations identified as Tier 1 (Partial) are encouraged to consider moving toward Tier 2 or greater, Tiers do not represent maturity levels. Tiers are meant to support organizational decision making about how to manage cybersecurity risk, as well as which dimensions of the organization are higher priority and could receive additional resources. Progression to higher Tiers is encouraged when a cost-benefit analysis indicates a feasible and cost-effective reduction of cybersecurity risk.

Successful implementation of the Framework is based upon achieving the outcomes described in the organization's Target Profile(s) and not upon Tier determination. Still, Tier selection and designation naturally affect Framework Profiles. The Tier recommendation by Business/Process Level managers, as approved by the Senior Executive Level, will help set the overall tone for how cybersecurity risk will be managed within the organization, and should influence prioritization within a Target Profile and assessments of progress in addressing gaps.

The Tier definitions are as follows:

Tier 1: Partial

- *Risk Management Process* Organizational cybersecurity risk management practices are not formalized, and risk is managed in an *ad hoc* and sometimes reactive manner. Prioritization of cybersecurity activities may not be directly informed by organizational risk objectives, the threat environment, or business/mission requirements.
- Integrated Risk Management Program There is limited awareness of cybersecurity risk at the organizational level. The organization implements cybersecurity risk management on an irregular, case-by-case basis due to varied experience or information gained from outside sources. The organization may not have processes that enable cybersecurity information to be shared within the organization.
- *External Participation* The organization does not understand its role in the larger ecosystem with respect to either its dependencies or dependents. The organization does not collaborate with or receive information (e.g., threat intelligence, best practices, technologies) from other entities (e.g., buyers, suppliers, dependencies, dependents, ISAOs, researchers, governments), nor does it share information. The organization is generally unaware of the cyber supply chain risks of the products and services it provides and that it uses.

Tier 2: Risk Informed

- *Risk Management Process* Risk management practices are approved by management but may not be established as organizational-wide policy. Prioritization of cybersecurity activities and protection needs is directly informed by organizational risk objectives, the threat environment, or business/mission requirements.
- Integrated Risk Management Program There is an awareness of cybersecurity risk at the organizational level, but an organization-wide approach to managing cybersecurity risk has not been established. Cybersecurity information is shared within the organization on an informal basis. Consideration of cybersecurity in organizational objectives and programs may occur at some but not all levels of the organization. Cyber risk assessment of organizational and external assets occurs, but is not typically repeatable or reoccurring.
- *External Participation* Generally, the organization understands its role in the larger ecosystem with respect to either its own dependencies or dependents, but not both. The organization collaborates with and receives some information from other entities and generates some of its own information, but may not share information with others. Additionally, the organization is aware of the cyber supply chain risks associated with the products and services it provides and uses, but does not act consistently or formally upon those risks.

Tier 3: Repeatable

- *Risk Management Process* The organization's risk management practices are formally approved and expressed as policy. Organizational cybersecurity practices are regularly updated based on the application of risk management processes to changes in business/mission requirements and a changing threat and technology landscape.
- Integrated Risk Management Program There is an organization-wide approach to manage cybersecurity risk. Risk-informed policies, processes, and procedures are defined, implemented as intended, and reviewed. Consistent methods are in place to respond effectively to changes in risk. Personnel possess the knowledge and skills to perform their appointed roles and responsibilities. The organization consistently and accurately monitors cybersecurity risk of organizational assets. Senior cybersecurity and non-cybersecurity executives communicate regularly regarding cybersecurity risk. Senior executives ensure consideration of cybersecurity through all lines of operation in the organization.
- *External Participation* The organization understands its role, dependencies, and dependents in the larger ecosystem and may contribute to the community's broader understanding of risks. It collaborates with and receives information from other entities regularly that complements internally generated information, and shares information with other entities. The organization is aware of the cyber supply chain risks associated with the products and services it provides and that it uses. Additionally, it usually acts formally upon those risks, including mechanisms such as written agreements to communicate baseline requirements, governance structures (e.g., risk councils), and policy implementation and monitoring.

Tier 4: Adaptive

- *Risk Management Process* The organization adapts its cybersecurity practices based on previous and current cybersecurity activities, including lessons learned and predictive indicators. Through a process of continuous improvement incorporating advanced cybersecurity technologies and practices, the organization actively adapts to a changing threat and technology landscape and responds in a timely and effective manner to evolving, sophisticated threats.
- Integrated Risk Management Program There is an organization-wide approach to managing cybersecurity risk that uses risk-informed policies, processes, and procedures to address potential cybersecurity events. The relationship between cybersecurity risk and organizational objectives is clearly understood and considered when making decisions. Senior executives monitor cybersecurity risk in the same context as financial risk and other organizational risks. The organizational budget is based on an understanding of the current and predicted risk environment and risk tolerance. Business units implement executive vision and analyze system-level risks in the context of the organizational risk tolerances. Cybersecurity risk management is part of the organizational culture and evolves from an awareness of previous activities and continuous awareness of activities on their systems and networks. The organization can quickly and efficiently account for changes to business/mission objectives in how risk is approached and communicated.

• *External Participation* - The organization understands its role, dependencies, and dependents in the larger ecosystem and contributes to the community's broader understanding of risks. It receives, generates, and reviews prioritized information that informs continuous analysis of its risks as the threat and technology landscapes evolve. The organization shares that information internally and externally with other collaborators. The organization uses real-time or near real-time information to understand and consistently act upon cyber supply chain risks associated with the products and services it provides and that it uses. Additionally, it communicates proactively, using formal (e.g. agreements) and informal mechanisms to develop and maintain strong supply chain relationships.

2.3 Framework Profile

The Framework Profile ("Profile") is the alignment of the Functions, Categories, and Subcategories with the business requirements, risk tolerance, and resources of the organization. A Profile enables organizations to establish a roadmap for reducing cybersecurity risk that is well aligned with organizational and sector goals, considers legal/regulatory requirements and industry best practices, and reflects risk management priorities. Given the complexity of many organizations, they may choose to have multiple profiles, aligned with particular components and recognizing their individual needs.

Framework Profiles can be used to describe the current state or the desired target state of specific cybersecurity activities. The Current Profile indicates the cybersecurity outcomes that are currently being achieved. The Target Profile indicates the outcomes needed to achieve the desired cybersecurity risk management goals. Profiles support business/mission requirements and aid in communicating risk within and between organizations. This Framework does not prescribe Profile templates, allowing for flexibility in implementation.

Comparison of Profiles (e.g., the Current Profile and Target Profile) may reveal gaps to be addressed to meet cybersecurity risk management objectives. An action plan to address these gaps to fulfill a given Category or Subcategory can contribute to the roadmap described above. Prioritizing the mitigation of gaps is driven by the organization's business needs and risk management processes. This risk-based approach enables an organization to gauge the resources needed (e.g., staffing, funding) to achieve cybersecurity goals in a cost-effective, prioritized manner. Furthermore, the Framework is a risk-based approach where the applicability and fulfillment of a given Subcategory is subject to the Profile's scope.

2.4 Coordination of Framework Implementation

Figure 2 describes a common flow of information and decisions at the following levels within an organization:

- Executive
- Business/Process
- Implementation/Operations

The executive level communicates the mission priorities, available resources, and overall risk tolerance to the business/process level. The business/process level uses the information as inputs into the risk management process, and then collaborates with the implementation/operations level to communicate business needs and create a Profile. The implementation/operations level communicates the Profile implementation progress to the business/process level. The business/process level uses this information to perform an impact assessment. Business/process level to inform the organization's overall risk management process and to the implementation/operations level to inform the organization's object.

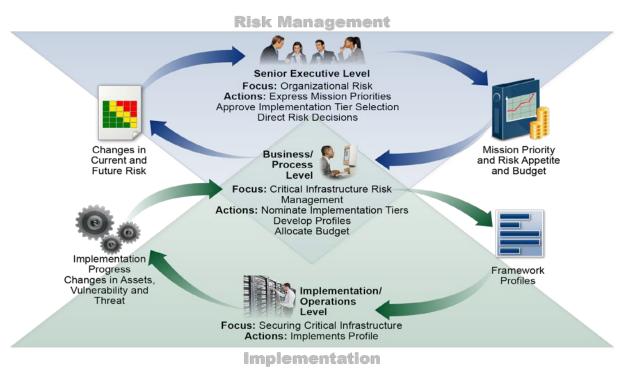


Figure 2: Notional Information and Decision Flows within an Organization

3.0 How to Use the Framework

An organization can use the Framework as a key part of its systematic process for identifying, assessing, and managing cybersecurity risk. The Framework is not designed to replace existing processes; an organization can use its current process and overlay it onto the Framework to determine gaps in its current cybersecurity risk approach and develop a roadmap to improvement. Using the Framework as a cybersecurity risk management tool, an organization can determine activities that are most important to critical service delivery and prioritize expenditures to maximize the impact of the investment.

The Framework is designed to complement existing business and cybersecurity operations. It can serve as the foundation for a new cybersecurity program or a mechanism for improving an existing program. The Framework provides a means of expressing cybersecurity requirements to business partners and customers and can help identify gaps in an organization's cybersecurity practices. It also provides a general set of considerations and processes for considering privacy and civil liberties implications in the context of a cybersecurity program.

The Framework can be applied throughout the life cycle phases of plan, design, build/buy, deploy, operate, and decommission. The plan phase begins the cycle of any system and lays the groundwork for everything that follows. Overarching cybersecurity considerations should be declared and described as clearly as possible. The plan should recognize that those considerations and requirements are likely to evolve during the remainder of the life cycle. The design phase should account for cybersecurity requirements as a part of a larger multidisciplinary systems engineering process.¹⁰ A key milestone of the design phase is validation that the system cybersecurity specifications match the needs and risk disposition of the organization as captured in a Framework Profile. The desired cybersecurity outcomes prioritized in a Target Profile should be incorporated when a) developing the system during the build phase and b) purchasing or outsourcing the system during the buy phase. That same Target Profile serves as a list of system cybersecurity features that should be assessed when deploying the system to verify all features are implemented. The cybersecurity outcomes determined by using the Framework then should serve as a basis for ongoing operation of the system. This includes occasional reassessment, capturing results in a Current Profile, to verify that cybersecurity requirements are still fulfilled. Typically, a complex web of dependencies (e.g., compensating and common controls) among systems means the outcomes documented in Target Profiles of related systems should be carefully considered as systems are decommissioned.

The following sections present different ways in which organizations can use the Framework.

3.1 **Basic Review of Cybersecurity Practices**

The Framework can be used to compare an organization's current cybersecurity activities with those outlined in the Framework Core. Through the creation of a Current Profile, organizations can examine the extent to which they are achieving the outcomes described in the Core Categories and Subcategories, aligned with the five high-level Functions: Identify, Protect, Detect, Respond, and Recover. An organization may find that it is already achieving the desired

¹⁰ NIST Special Publication 800-160 Volume 1, *System Security Engineering, Considerations for a Multidisciplinary Approach in the Engineering of Trustworthy Secure Systems*, Ross et al, November 2016 (updated March 21, 2018), <u>https://doi.org/10.6028/NIST.SP.800-160v1</u>

outcomes, thus managing cybersecurity commensurate with the known risk. Alternatively, an organization may determine that it has opportunities to (or needs to) improve. The organization can use that information to develop an action plan to strengthen existing cybersecurity practices and reduce cybersecurity risk. An organization may also find that it is overinvesting to achieve certain outcomes. The organization can use this information to reprioritize resources.

While they do not replace a risk management process, these five high-level Functions will provide a concise way for senior executives and others to distill the fundamental concepts of cybersecurity risk so that they can assess how identified risks are managed, and how their organization stacks up at a high level against existing cybersecurity standards, guidelines, and practices. The Framework can also help an organization answer fundamental questions, including "How are we doing?" Then they can move in a more informed way to strengthen their cybersecurity practices where and when deemed necessary.

3.2 Establishing or Improving a Cybersecurity Program

The following steps illustrate how an organization could use the Framework to create a new cybersecurity program or improve an existing program. These steps should be repeated as necessary to continuously improve cybersecurity.

Step 1: Prioritize and Scope. The organization identifies its business/mission objectives and high-level organizational priorities. With this information, the organization makes strategic decisions regarding cybersecurity implementations and determines the scope of systems and assets that support the selected business line or process. The Framework can be adapted to support the different business lines or processes within an organization, which may have different business needs and associated risk tolerance. Risk tolerances may be reflected in a target Implementation Tier.

Step 2: Orient. Once the scope of the cybersecurity program has been determined for the business line or process, the organization identifies related systems and assets, regulatory requirements, and overall risk approach. The organization then consults sources to identify threats and vulnerabilities applicable to those systems and assets.

Step 3: Create a Current Profile. The organization develops a Current Profile by indicating which Category and Subcategory outcomes from the Framework Core are currently being achieved. If an outcome is partially achieved, noting this fact will help support subsequent steps by providing baseline information.

Step 4: Conduct a Risk Assessment. This assessment could be guided by the organization's overall risk management process or previous risk assessment activities. The organization analyzes the operational environment in order to discern the likelihood of a cybersecurity event and the impact that the event could have on the organization. It is important that organizations identify emerging risks and use cyber threat information from internal and external sources to gain a better understanding of the likelihood and impact of cybersecurity events.

Step 5: Create a Target Profile. The organization creates a Target Profile that focuses on the assessment of the Framework Categories and Subcategories describing the organization's desired cybersecurity outcomes. Organizations also may develop their own additional Categories and

Subcategories to account for unique organizational risks. The organization may also consider influences and requirements of external stakeholders such as sector entities, customers, and business partners when creating a Target Profile. The Target Profile should appropriately reflect criteria within the target Implementation Tier.

Step 6: Determine, Analyze, and Prioritize Gaps. The organization compares the Current Profile and the Target Profile to determine gaps. Next, it creates a prioritized action plan to address gaps – reflecting mission drivers, costs and benefits, and risks – to achieve the outcomes in the Target Profile. The organization then determines resources, including funding and workforce, necessary to address the gaps. Using Profiles in this manner encourages the organization to make informed decisions about cybersecurity activities, supports risk management, and enables the organization to perform cost-effective, targeted improvements.

Step 7: Implement Action Plan. The organization determines which actions to take to address the gaps, if any, identified in the previous step and then adjusts its current cybersecurity practices in order to achieve the Target Profile. For further guidance, the Framework identifies example Informative References regarding the Categories and Subcategories, but organizations should determine which standards, guidelines, and practices, including those that are sector specific, work best for their needs.

An organization repeats the steps as needed to continuously assess and improve its cybersecurity. For instance, organizations may find that more frequent repetition of the orient step improves the quality of risk assessments. Furthermore, organizations may monitor progress through iterative updates to the Current Profile, subsequently comparing the Current Profile to the Target Profile. Organizations may also use this process to align their cybersecurity program with their desired Framework Implementation Tier.

3.3 Communicating Cybersecurity Requirements with Stakeholders

The Framework provides a common language to communicate requirements among interdependent stakeholders responsible for the delivery of essential critical infrastructure products and services. Examples include:

- An organization may use a Target Profile to express cybersecurity risk management requirements to an external service provider (e.g., a cloud provider to which it is exporting data).
- An organization may express its cybersecurity state through a Current Profile to report results or to compare with acquisition requirements.
- A critical infrastructure owner/operator, having identified an external partner on whom that infrastructure depends, may use a Target Profile to convey required Categories and Subcategories.
- A critical infrastructure sector may establish a Target Profile that can be used among its constituents as an initial baseline Profile to build their tailored Target Profiles.
- An organization can better manage cybersecurity risk among stakeholders by assessing their position in the critical infrastructure and the broader digital economy using Implementation Tiers.

Communication is especially important among stakeholders up and down supply chains. Supply chains are complex, globally distributed, and interconnected sets of resources and processes

between multiple levels of organizations. Supply chains begin with the sourcing of products and services and extend from the design, development, manufacturing, processing, handling, and delivery of products and services to the end user. Given these complex and interconnected relationships, supply chain risk management (SCRM) is a critical organizational function.¹¹

Cyber SCRM is the set of activities necessary to manage cybersecurity risk associated with external parties. More specifically, cyber SCRM addresses both the cybersecurity effect an organization has on external parties and the cybersecurity effect external parties have on an organization.

A primary objective of cyber SCRM is to identify, assess, and mitigate "products and services that may contain potentially malicious functionality, are counterfeit, or are vulnerable due to poor manufacturing and development practices within the cyber supply chain¹²." Cyber SCRM activities may include:

- Determining cybersecurity requirements for suppliers,
- Enacting cybersecurity requirements through formal agreement (e.g., contracts),
- Communicating to suppliers how those cybersecurity requirements will be verified and validated,
- Verifying that cybersecurity requirements are met through a variety of assessment methodologies, and
- Governing and managing the above activities.

As depicted in Figure 3, cyber SCRM encompasses technology suppliers and buyers, as well as non-technology suppliers and buyers, where technology is minimally composed of information technology (IT), industrial control systems (ICS), cyber-physical systems (CPS), and connected devices more generally, including the Internet of Things (IoT). Figure 3 depicts an organization at a single point in time. However, through the normal course of business operations, most organizations will be both an upstream supplier and downstream buyer in relation to other organizations or end users.

¹¹ Communicating Cybersecurity Requirements (Section 3.3) and Buying Decisions (Section 3.4) address only two uses of the Framework for cyber SCRM and are not intended to address cyber SCRM comprehensively.

¹² NIST Special Publication 800-161, *Supply Chain Risk Management Practices for Federal Information Systems and Organizations*, Boyens et al, April 2015, <u>https://doi.org/10.6028/NIST.SP.800-161</u>

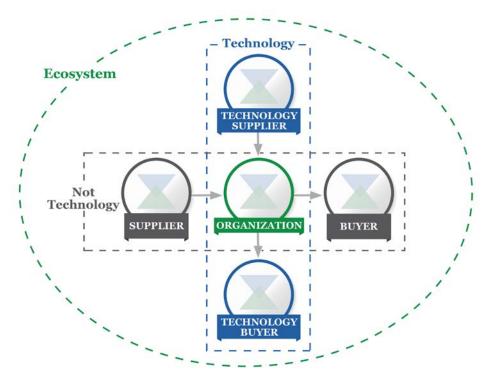


Figure 3: Cyber Supply Chain Relationships

The parties described in Figure 3 comprise an organization's cybersecurity ecosystem. These relationships highlight the crucial role of cyber SCRM in addressing cybersecurity risk in critical infrastructure and the broader digital economy. These relationships, the products and services they provide, and the risks they present should be identified and factored into the protective and detective capabilities of organizations, as well as their response and recovery protocols.

In the figure above, "Buyer" refers to the downstream people or organizations that consume a given product or service from an organization, including both for-profit and not-for-profit organizations. "Supplier" encompasses upstream product and service providers that are used for an organization's internal purposes (e.g., IT infrastructure) or integrated into the products or services provided to the Buyer. These terms are applicable for both technology-based and non-technology-based products and services.

Whether considering individual Subcategories of the Core or the comprehensive considerations of a Profile, the Framework offers organizations and their partners a method to help ensure the new product or service meets critical security outcomes. By first selecting outcomes that are relevant to the context (e.g., transmission of Personally Identifiable Information (PII), mission critical service delivery, data verification services, product or service integrity) the organization then can evaluate partners against those criteria. For example, if a system is being purchased that will monitor Operational Technology (OT) for anomalous network communication, availability may be a particularly important cybersecurity objective to achieve and should drive a Technology Supplier evaluation against applicable Subcategories (e.g., ID.BE-4, ID.SC-3, ID.SC-4, ID.SC-5, PR.DS-6, PR.DS-6, PR.DS-7, PR.DS-8, PR.IP-1, DE.AE-5).

3.4 **Buying Decisions**

Since a Framework Target Profile is a prioritized list of organizational cybersecurity requirements, Target Profiles can be used to inform decisions about buying products and services. This transaction varies from Communicating Cybersecurity Requirements with Stakeholders (addressed in Section 3.3) in that it may not be possible to impose a set of cybersecurity requirements on the supplier. The objective should be to make the best buying decision among multiple suppliers, given a carefully determined list of cybersecurity requirements. Often, this means some degree of trade-off, comparing multiple products or services with known gaps to the Target Profile.

Once a product or service is purchased, the Profile also can be used to track and address residual cybersecurity risk. For example, if the service or product purchased did not meet all the objectives described in the Target Profile, the organization can address the residual risk through other management actions. The Profile also provides the organization a method for assessing if the product meets cybersecurity outcomes through periodic review and testing mechanisms.

3.5 Identifying Opportunities for New or Revised Informative References

The Framework can be used to identify opportunities for new or revised standards, guidelines, or practices where additional Informative References would help organizations address emerging needs. An organization implementing a given Subcategory, or developing a new Subcategory, might discover that there are few Informative References, if any, for a related activity. To address that need, the organization might collaborate with technology leaders and/or standards bodies to draft, develop, and coordinate standards, guidelines, or practices.

3.6 Methodology to Protect Privacy and Civil Liberties

This section describes a methodology to address individual privacy and civil liberties implications that may result from cybersecurity. This methodology is intended to be a general set of considerations and processes since privacy and civil liberties implications may differ by sector or over time and organizations may address these considerations and processes with a range of technical implementations. Nonetheless, not all activities in a cybersecurity program engender privacy and civil liberties considerations. Technical privacy standards, guidelines, and additional best practices may need to be developed to support improved technical implementations.

Privacy and cybersecurity have a strong connection. An organization's cybersecurity activities also can create risks to privacy and civil liberties when personal information is used, collected, processed, maintained, or disclosed. Some examples include: cybersecurity activities that result in the over-collection or over-retention of personal information; disclosure or use of personal information unrelated to cybersecurity activities; and cybersecurity mitigation activities that result in denial of service or other similar potentially adverse impacts, including some types of incident detection or monitoring that may inhibit freedom of expression or association.

The government and its agents have a responsibility to protect civil liberties arising from cybersecurity activities. As referenced in the methodology below, government or its agents that own or operate critical infrastructure should have a process in place to support compliance of cybersecurity activities with applicable privacy laws, regulations, and Constitutional requirements.

To address privacy implications, organizations may consider how their cybersecurity program might incorporate privacy principles such as: data minimization in the collection, disclosure, and retention of personal information material related to the cybersecurity incident; use limitations outside of cybersecurity activities on any information collected specifically for cybersecurity activities; transparency for certain cybersecurity activities; individual consent and redress for adverse impacts arising from use of personal information in cybersecurity activities; data quality, integrity, and security; and accountability and auditing.

As organizations assess the Framework Core in <u>Appendix A</u>, the following processes and activities may be considered as a means to address the above-referenced privacy and civil liberties implications:

Governance of cybersecurity risk

- An organization's assessment of cybersecurity risk and potential risk responses considers the privacy implications of its cybersecurity program.
- Individuals with cybersecurity-related privacy responsibilities report to appropriate management and are appropriately trained.
- Process is in place to support compliance of cybersecurity activities with applicable privacy laws, regulations, and Constitutional requirements.
- Process is in place to assess implementation of the above organizational measures and controls.

Approaches to identifying, authenticating, and authorizing individuals to access organizational assets and systems

• Steps are taken to identify and address the privacy implications of identity management and access control measures to the extent that they involve collection, disclosure, or use of personal information.

Awareness and training measures

- Applicable information from organizational privacy policies is included in cybersecurity workforce training and awareness activities.
- Service providers that provide cybersecurity-related services for the organization are informed about the organization's applicable privacy policies.

Anomalous activity detection and system and assets monitoring

• Process is in place to conduct a privacy review of an organization's anomalous activity detection and cybersecurity monitoring.

Response activities, including information sharing or other mitigation efforts

- Process is in place to assess and address whether, when, how, and the extent to which personal information is shared outside the organization as part of cybersecurity information sharing activities.
- Process is in place to conduct a privacy review of an organization's cybersecurity mitigation efforts.

4.0 Self-Assessing Cybersecurity Risk with the Framework

The Cybersecurity Framework is designed to reduce risk by improving the management of cybersecurity risk to organizational objectives. Ideally, organizations using the Framework will be able to measure and assign values to their risk *along with* the cost and benefits of steps taken to reduce risk to acceptable levels. The better an organization is able to measure its risk, costs, and benefits of cybersecurity strategies and steps, the more rational, effective, and valuable its cybersecurity approach and investments will be.

Over time, self-assessment and measurement should improve decision making about investment priorities. For example, measuring – or at least robustly characterizing – aspects of an organization's cybersecurity state and trends over time can enable that organization to understand and convey meaningful risk information to dependents, suppliers, buyers, and other parties. An organization can accomplish this internally or by seeking a third-party assessment. If done properly and with an appreciation of limitations, these measurements can provide a basis for strong trusted relationships, both inside and outside of an organization.

To examine the effectiveness of investments, an organization must first have a clear understanding of its organizational objectives, the relationship between those objectives and supportive cybersecurity outcomes, and how those discrete cybersecurity outcomes are implemented and managed. While measurements of all those items is beyond the scope of the Framework, the cybersecurity outcomes of the Framework Core support self-assessment of investment effectiveness and cybersecurity activities in the following ways:

- Making choices about how different portions of the cybersecurity operation should influence the selection of Target Implementation Tiers,
- Evaluating the organization's approach to cybersecurity risk management by determining Current Implementation Tiers,
- Prioritizing cybersecurity outcomes by developing Target Profiles,
- Determining the degree to which specific cybersecurity steps achieve desired cybersecurity outcomes by assessing Current Profiles, and
- Measuring the degree of implementation for controls catalogs or technical guidance listed as Informative References.

The development of cybersecurity performance metrics is evolving. Organizations should be thoughtful, creative, and careful about the ways in which they employ measurements to optimize use, while avoiding reliance on artificial indicators of current state and progress in improving cybersecurity risk management. Judging cyber risk requires discipline and should be revisited periodically. Any time measurements are employed as part of the Framework process, organizations are encouraged to clearly identify and know why these measurements are important and how they will contribute to the overall management of cybersecurity risk. They also should be clear about the limitations of measurements that are used.

For example, tracking security measures and business outcomes may provide meaningful insight as to how changes in granular security controls affect the completion of organizational objectives. Verifying achievement of some organizational objectives requires analyzing the data only *after* that objective was to have been achieved. This type of lagging measure is more absolute. However, it is often more valuable to predict whether a cybersecurity risk *may* occur, and the impact it *might* have, using a leading measure.

Organizations are encouraged to innovate and customize how they incorporate measurements into their application of the Framework with a full appreciation of their usefulness and limitations.

Appendix A: Framework Core

This appendix presents the Framework Core: a listing of Functions, Categories, Subcategories, and Informative References that describe specific cybersecurity activities that are common across all critical infrastructure sectors. The chosen presentation format for the Framework Core does not suggest a specific implementation order or imply a degree of importance of the Categories, Subcategories, and Informative References. The Framework Core presented in this appendix represents a common set of activities for managing cybersecurity risk. While the Framework is not exhaustive, it is extensible, allowing organizations, sectors, and other entities to use Subcategories and Informative References that are cost-effective and efficient and that enable them to manage their cybersecurity risk. Activities can be selected from the Framework Core during the Profile creation process and additional Categories, Subcategories, and Informative References that organization's risk management processes, legal/regulatory requirements, business/mission objectives, and organizational constraints guide the selection of these activities during Profile creation. Personal information is considered a component of data or assets referenced in the Categories when assessing security risks and protections.

While the intended outcomes identified in the Functions, Categories, and Subcategories are the same for IT and ICS, the operational environments and considerations for IT and ICS differ. ICS have a direct effect on the physical world, including potential risks to the health and safety of individuals, and impact on the environment. Additionally, ICS have unique performance and reliability requirements compared with IT, and the goals of safety and efficiency must be considered when implementing cybersecurity measures.

For ease of use, each component of the Framework Core is given a unique identifier. Functions and Categories each have a unique alphabetic identifier, as shown in Table 1. Subcategories within each Category are referenced numerically; the unique identifier for each Subcategory is included in Table 2.

Additional supporting material, including Informative References, relating to the Framework can be found on the NIST website at <u>http://www.nist.gov/cyberframework/</u>.

Function Unique Identifier	Function	Category Unique Identifier	Category	
ID	Identify	ID.AM	Asset Management	
		ID.BE	Business Environment	
		ID.GV	Governance	
		ID.RA	Risk Assessment	
		ID.RM	Risk Management Strategy	
		ID.SC	Supply Chain Risk Management	
PR	Protect	PR.AC	Identity Management and Access Control	
		PR.AT	Awareness and Training	
		PR.DS	Data Security	
	PR.		Information Protection Processes and Procedures	
		PR.MA	Maintenance	
		PR.PT	Protective Technology	
DE	Detect	DE.AE	Anomalies and Events	
		DE.CM	Security Continuous Monitoring	
		DE.DP	Detection Processes	
RS	Respond	RS.RP	Response Planning	
		RS.CO	Communications	
		RS.AN	Analysis	
		RS.MI	Mitigation	
		RS.IM	Improvements	
RC	Recover	RC.RP	Recovery Planning	
		RC.IM	Improvements	
		RC.CO	Communications	

Table 1:	Function	and	Category	Unique	Identifiers
100010 11		~	eareger,	0	

Table 2: Framework Core

Function	Category	Subcategory	Informative References
IDENTIFY (ID)	Asset Management (ID.AM): The data, personnel, devices, systems, and facilities that enable the organization to achieve business purposes are identified and managed consistent with their relative importance to	ID.AM-1: Physical devices and systems within the organization are inventoried	CIS CSC 1 COBIT 5 BAI09.01, BAI09.02 ISA 62443-2-1:2009 4.2.3.4 ISA 62443-3-3:2013 SR 7.8 ISO/IEC 27001:2013 A.8.1.1, A.8.1.2 NIST SP 800-53 Rev. 4 CM-8, PM-5
	organizational objectives and the organization's risk strategy.	ID.AM-2: Software platforms and applications within the organization are inventoried	CIS CSC 2 COBIT 5 BAI09.01, BAI09.02, BAI09.05 ISA 62443-2-1:2009 4.2.3.4 ISA 62443-3-3:2013 SR 7.8 ISO/IEC 27001:2013 A.8.1.1, A.8.1.2, A.12.5.1 NIST SP 800-53 Rev. 4 CM-8, PM-5
		ID.AM-3: Organizational communication and data flows are mapped	CIS CSC 12 COBIT 5 DSS05.02 ISA 62443-2-1:2009 4.2.3.4 ISO/IEC 27001:2013 A.13.2.1, A.13.2.2 NIST SP 800-53 Rev. 4 AC-4, CA-3, CA-9, PL-8
		ID.AM-4: External information systems are catalogued	CIS CSC 12 COBIT 5 APO02.02, APO10.04, DSS01.02 ISO/IEC 27001:2013 A.11.2.6 NIST SP 800-53 Rev. 4 AC-20, SA-9
		ID.AM-5: Resources (e.g., hardware, devices, data, time, personnel, and software) are prioritized based on their classification, criticality, and business value	CIS CSC 13, 14 COBIT 5 APO03.03, APO03.04, APO12.01, BAI04.02, BAI09.02 ISA 62443-2-1:2009 4.2.3.6 ISO/IEC 27001:2013 A.8.2.1 NIST SP 800-53 Rev. 4 CP-2, RA-2, SA-14, SC-6
		ID.AM-6: Cybersecurity roles and responsibilities for the entire workforce and	CIS CSC 17, 19 COBIT 5 APO01.02, APO07.06, APO13.01, DSS06.03

Function	Category	Subcategory	Informative References
		third-party stakeholders (e.g., suppliers, customers, partners) are established	ISA 62443-2-1:2009 4.3.2.3.3 ISO/IEC 27001:2013 A.6.1.1 NIST SP 800-53 Rev. 4 CP-2, PS-7, PM-11
Business Environment (ID.BE): The organization's mission, objectives, stakeholders, and activities are understood and prioritized; this information is	ID.BE-1: The organization's role in the supply chain is identified and communicated	COBIT 5 APO08.01, APO08.04, APO08.05, APO10.03, APO10.04, APO10.05 ISO/IEC 27001:2013 A.15.1.1, A.15.1.2, A.15.1.3, A.15.2.1, A.15.2.2 NIST SP 800-53 Rev. 4 CP-2, SA-12	
	used to inform cybersecurity roles, responsibilities, and risk management decisions.	ID.BE-2: The organization's place in critical infrastructure and its industry sector is identified and communicated	COBIT 5 APO02.06, APO03.01 ISO/IEC 27001:2013 Clause 4.1 NIST SP 800-53 Rev. 4 PM-8
		ID.BE-3: Priorities for organizational mission, objectives, and activities are established and communicated	COBIT 5 APO02.01, APO02.06, APO03.01 ISA 62443-2-1:2009 4.2.2.1, 4.2.3.6 NIST SP 800-53 Rev. 4 PM-11, SA-14
		ID.BE-4: Dependencies and critical functions for delivery of critical services are established	COBIT 5 APO10.01, BAI04.02, BAI09.02 ISO/IEC 27001:2013 A.11.2.2, A.11.2.3, A.12.1.3 NIST SP 800-53 Rev. 4 CP-8, PE-9, PE-11, PM-8, SA-14
		ID.BE-5: Resilience requirements to support delivery of critical services are established for all operating states (e.g. under duress/attack, during recovery, normal operations)	COBIT 5 BAI03.02, DSS04.02 ISO/IEC 27001:2013 A.11.1.4, A.17.1.1, A.17.1.2, A.17.2.1 NIST SP 800-53 Rev. 4 CP-2, CP-11, SA-13, SA- 14
	Governance (ID.GV): The policies, procedures, and processes to manage and monitor the organization's regulatory, legal, risk, environmental, and operational requirements are understood and inform the	ID.GV-1: Organizational cybersecurity policy is established and communicated	CIS CSC 19 COBIT 5 APO01.03, APO13.01, EDM01.01, EDM01.02 ISA 62443-2-1:2009 4.3.2.6 ISO/IEC 27001:2013 A.5.1.1 NIST SP 800-53 Rev. 4 -1 controls from all security control families

Version 1.1

Function	Category	Subcategory	Informative References
	management of cybersecurity risk.	ID.GV-2: Cybersecurity roles and responsibilities are coordinated and aligned with internal roles and external partners	CIS CSC 19 COBIT 5 APO01.02, APO10.03, APO13.02, DSS05.04 ISA 62443-2-1:2009 4.3.2.3.3 ISO/IEC 27001:2013 A.6.1.1, A.7.2.1, A.15.1.1 NIST SP 800-53 Rev. 4 PS-7, PM-1, PM-2
		ID.GV-3: Legal and regulatory requirements regarding cybersecurity, including privacy and civil liberties obligations, are understood and managed	CIS CSC 19 COBIT 5 BAI02.01, MEA03.01, MEA03.04 ISA 62443-2-1:2009 4.4.3.7 ISO/IEC 27001:2013 A.18.1.1, A.18.1.2, A.18.1.3, A.18.1.4, A.18.1.5 NIST SP 800-53 Rev. 4 -1 controls from all security control families
		ID.GV-4: Governance and risk management processes address cybersecurity risks	COBIT 5 EDM03.02, APO12.02, APO12.05, DSS04.02 ISA 62443-2-1:2009 4.2.3.1, 4.2.3.3, 4.2.3.8, 4.2.3.9, 4.2.3.11, 4.3.2.4.3, 4.3.2.6.3 ISO/IEC 27001:2013 Clause 6 NIST SP 800-53 Rev. 4 SA-2, PM-3, PM-7, PM- 9, PM-10, PM-11
	Risk Assessment (ID.RA): The organization understands the cybersecurity risk to organizational operations (including mission, functions, image, or reputation), organizational assets, and individuals.	ID.RA-1: Asset vulnerabilities are identified and documented	CIS CSC 4 COBIT 5 APO12.01, APO12.02, APO12.03, APO12.04, DSS05.01, DSS05.02 ISA 62443-2-1:2009 4.2.3, 4.2.3.7, 4.2.3.9, 4.2.3.12 ISO/IEC 27001:2013 A.12.6.1, A.18.2.3 NIST SP 800-53 Rev. 4 CA-2, CA-7, CA-8, RA- 3, RA-5, SA-5, SA-11, SI-2, SI-4, SI-5
		ID.RA-2: Cyber threat intelligence is received from information sharing forums and sources	CIS CSC 4 COBIT 5 BAI08.01 ISA 62443-2-1:2009 4.2.3, 4.2.3.9, 4.2.3.12 ISO/IEC 27001:2013 A.6.1.4 NIST SP 800-53 Rev. 4 SI-5, PM-15, PM-16

Version 1.1

Function	Category	Subcategory	Informative References
		ID.RA-3: Threats, both internal and external, are identified and documented	CIS CSC 4 COBIT 5 APO12.01, APO12.02, APO12.03, APO12.04 ISA 62443-2-1:2009 4.2.3, 4.2.3.9, 4.2.3.12 ISO/IEC 27001:2013 Clause 6.1.2 NIST SP 800-53 Rev. 4 RA-3, SI-5, PM-12, PM- 16
		ID.RA-4: Potential business impacts and likelihoods are identified	CIS CSC 4 COBIT 5 DSS04.02 ISA 62443-2-1:2009 4.2.3, 4.2.3.9, 4.2.3.12 ISO/IEC 27001:2013 A.16.1.6, Clause 6.1.2 NIST SP 800-53 Rev. 4 RA-2, RA-3, SA-14, PM- 9, PM-11
		ID.RA-5: Threats, vulnerabilities, likelihoods, and impacts are used to determine risk	CIS CSC 4 COBIT 5 APO12.02 ISO/IEC 27001:2013 A.12.6.1 NIST SP 800-53 Rev. 4 RA-2, RA-3, PM-16
		ID.RA-6: Risk responses are identified and prioritized	CIS CSC 4 COBIT 5 APO12.05, APO13.02 ISO/IEC 27001:2013 Clause 6.1.3 NIST SP 800-53 Rev. 4 PM-4, PM-9
	Risk Management Strategy (ID.RM): The organization's priorities, constraints, risk tolerances, and assumptions are established and used to support operational risk decisions.	ID.RM-1: Risk management processes are established, managed, and agreed to by organizational stakeholders	CIS CSC 4 COBIT 5 APO12.04, APO12.05, APO13.02, BAI02.03, BAI04.02 ISA 62443-2-1:2009 4.3.4.2 ISO/IEC 27001:2013 Clause 6.1.3, Clause 8.3, Clause 9.3 NIST SP 800-53 Rev. 4 PM-9
		ID.RM-2: Organizational risk tolerance is determined and clearly expressed	COBIT 5 APO12.06 ISA 62443-2-1:2009 4.3.2.6.5 ISO/IEC 27001:2013 Clause 6.1.3, Clause 8.3 NIST SP 800-53 Rev. 4 PM-9

Version 1.1

Function	Category	Subcategory	Informative References
Management (1 The organization's constraints, risk tole assumptions are esta used to support risk associated with man chain risk. The orga established and impl processes to identify		ID.RM-3: The organization's determination of risk tolerance is informed by its role in critical infrastructure and sector specific risk analysis	COBIT 5 APO12.02 ISO/IEC 27001:2013 Clause 6.1.3, Clause 8.3 NIST SP 800-53 Rev. 4 SA-14, PM-8, PM-9, PM- 11
	Supply Chain Risk Management (ID.SC): The organization's priorities, constraints, risk tolerances, and assumptions are established and used to support risk decisions associated with managing supply chain risk. The organization has established and implemented the	ID.SC-1: Cyber supply chain risk management processes are identified, established, assessed, managed, and agreed to by organizational stakeholders	CIS CSC 4 COBIT 5 APO10.01, APO10.04, APO12.04, APO12.05, APO13.02, BAI01.03, BAI02.03, BAI04.02 ISA 62443-2-1:2009 4.3.4.2 ISO/IEC 27001:2013 A.15.1.1, A.15.1.2, A.15.1.3, A.15.2.1, A.15.2.2 NIST SP 800-53 Rev. 4 SA-9, SA-12, PM-9
	processes to identify, assess and manage supply chain risks.	ID.SC-2: Suppliers and third party partners of information systems, components, and services are identified, prioritized, and assessed using a cyber supply chain risk assessment process	 COBIT 5 APO10.01, APO10.02, APO10.04, APO10.05, APO12.01, APO12.02, APO12.03, APO12.04, APO12.05, APO12.06, APO13.02, BAI02.03 ISA 62443-2-1:2009 4.2.3.1, 4.2.3.2, 4.2.3.3, 4.2.3.4, 4.2.3.6, 4.2.3.8, 4.2.3.9, 4.2.3.10, 4.2.3.12, 4.2.3.13, 4.2.3.14 ISO/IEC 27001:2013 A.15.2.1, A.15.2.2 NIST SP 800-53 Rev. 4 RA-2, RA-3, SA-12, SA- 14, SA-15, PM-9
		ID.SC-3: Contracts with suppliers and third-party partners are used to implement appropriate measures designed to meet the objectives of an organization's cybersecurity program and Cyber Supply Chain Risk Management Plan.	COBIT 5 APO10.01, APO10.02, APO10.03, APO10.04, APO10.05 ISA 62443-2-1:2009 4.3.2.6.4, 4.3.2.6.7 ISO/IEC 27001:2013 A.15.1.1, A.15.1.2, A.15.1.3 NIST SP 800-53 Rev. 4 SA-9, SA-11, SA-12, PM-9
		ID.SC-4: Suppliers and third-party partners are routinely assessed using audits, test results, or other forms of evaluations to confirm they are meeting their contractual obligations.	COBIT 5 APO10.01, APO10.03, APO10.04, APO10.05, MEA01.01, MEA01.02, MEA01.03, MEA01.04, MEA01.05 ISA 62443-2-1:2009 4.3.2.6.7 ISA 62443-3-3:2013 SR 6.1 ISO/IEC 27001:2013 A.15.2.1, A.15.2.2

Function	Category	Subcategory	Informative References
			NIST SP 800-53 Rev. 4 AU-2, AU-6, AU-12, AU-16, PS-7, SA-9, SA-12
		ID.SC-5: Response and recovery planning and testing are conducted with suppliers and third-party providers	CIS CSC 19, 20 COBIT 5 DSS04.04 ISA 62443-2-1:2009 4.3.2.5.7, 4.3.4.5.11 ISA 62443-3-3:2013 SR 2.8, SR 3.3, SR.6.1, SR 7.3, SR 7.4 ISO/IEC 27001:2013 A.17.1.3 NIST SP 800-53 Rev. 4 CP-2, CP-4, IR-3, IR-4,
PROTECT (PR)	In the second	PR.AC-1: Identities and credentials are issued, managed, verified, revoked, and audited for authorized devices, users and processes	IR-6, IR-8, IR-9 CIS CSC 1, 5, 15, 16 COBIT 5 DSS05.04, DSS06.03 ISA 62443-2-1:2009 4.3.3.5.1 ISA 62443-3-3:2013 SR 1.1, SR 1.2, SR 1.3, SR 1.4, SR 1.5, SR 1.7, SR 1.8, SR 1.9 e 3, A.9.2.4, A.9.2.6, A.9.3.1, A.9.4.2, A.9.4.3 NIST SP 800-53 Rev. 4 AC-1, AC-2, IA-1, IA-2, IA-3, IA-4, IA-5, IA-6, IA-7, IA-8, IA-9, IA-10, IA-11
		PR.AC-2: Physical access to assets is managed and protected	COBIT 5 DSS01.04, DSS05.05 ISA 62443-2-1:2009 4.3.3.3.2, 4.3.3.3.8 ISO/IEC 27001:2013 A.11.1.1, A.11.1.2, A.11.1.3, A.11.1.4, A.11.1.5, A.11.1.6, A.11.2.1, A.11.2.3, A.11.2.5, A.11.2.6, A.11.2.7, A.11.2.8 NIST SP 800-53 Rev. 4 PE-2, PE-3, PE-4, PE-5, PE-6, PE-8
		PR.AC-3: Remote access is managed	CIS CSC 12 COBIT 5 APO13.01, DSS01.04, DSS05.03 ISA 62443-2-1:2009 4.3.3.6.6 ISA 62443-3-3:2013 SR 1.13, SR 2.6 ISO/IEC 27001:2013 A.6.2.1, A.6.2.2, A.11.2.6, A.13.1.1, A.13.2.1

Function	Category	Subcategory	Informative References
			NIST SP 800-53 Rev. 4 AC-1, AC-17, AC-19, AC-20, SC-15
		PR.AC-4: Access permissions and authorizations are managed, incorporating the principles of least privilege and separation of duties	CIS CSC 3, 5, 12, 14, 15, 16, 18 COBIT 5 DSS05.04 ISA 62443-2-1:2009 4.3.3.7.3 ISA 62443-3-3:2013 SR 2.1 ISO/IEC 27001:2013 A.6.1.2, A.9.1.2, A.9.2.3, A.9.4.1, A.9.4.4, A.9.4.5 NIST SP 800-53 Rev. 4 AC-1, AC-2, AC-3, AC-
		PR.AC-5: Network integrity is protected (e.g., network segregation, network segmentation)	5, AC-6, AC-14, AC-16, AC-24 CIS CSC 9, 14, 15, 18 COBIT 5 DSS01.05, DSS05.02 ISA 62443-2-1:2009 4.3.3.4 ISA 62443-3-3:2013 SR 3.1, SR 3.8 ISO/IEC 27001:2013 A.13.1.1, A.13.1.3, A.13.2.1, A.14.1.2, A.14.1.3 NIST SP 800-53 Rev. 4 AC-4, AC-10, SC-7
		PR.AC-6: Identities are proofed and bound to credentials and asserted in interactions	CIS CSC, 16 COBIT 5 DSS05.04, DSS05.05, DSS05.07, DSS06.03 ISA 62443-2-1:2009 4.3.3.2.2, 4.3.3.5.2, 4.3.3.7.2, 4.3.3.7.4 ISA 62443-3-3:2013 SR 1.1, SR 1.2, SR 1.4, SR 1.5, SR 1.9, SR 2.1 ISO/IEC 27001:2013, A.7.1.1, A.9.2.1 NIST SP 800-53 Rev. 4 AC-1, AC-2, AC-3, AC- 16, AC-19, AC-24, IA-1, IA-2, IA-4, IA-5, IA-8, PE-2, PS-3
		PR.AC-7: Users, devices, and other assets are authenticated (e.g., single-factor, multifactor) commensurate with the risk of the transaction (e.g., individuals' security and privacy risks and other organizational risks)	CIS CSC 1, 12, 15, 16 COBIT 5 DSS05.04, DSS05.10, DSS06.10 ISA 62443-2-1:2009 4.3.3.6.1, 4.3.3.6.2, 4.3.3.6.3, 4.3.3.6.4, 4.3.3.6.5, 4.3.3.6.6, 4.3.3.6.7, 4.3.3.6.8, 4.3.3.6.9

Function	Category	Subcategory	Informative References
			ISA 62443-3-3:2013 SR 1.1, SR 1.2, SR 1.5, SR 1.7, SR 1.8, SR 1.9, SR 1.10 ISO/IEC 27001:2013 A.9.2.1, A.9.2.4, A.9.3.1, A.9.4.2, A.9.4.3, A.18.1.4 NIST SP 800-53 Rev. 4 AC-7, AC-8, AC-9, AC-11, AC-12, AC-14, IA-1, IA-2, IA-3, IA-4, IA-5, IA-8, IA-9, IA-10, IA-11
	Awareness and Training (PR.AT): The organization's personnel and partners are provided cybersecurity awareness education and are trained to perform their cybersecurity- related duties and responsibilities consistent with related policies, procedures, and agreements.	PR.AT-1: All users are informed and trained	CIS CSC 17, 18 COBIT 5 APO07.03, BAI05.07 ISA 62443-2-1:2009 4.3.2.4.2 ISO/IEC 27001:2013 A.7.2.2, A.12.2.1 NIST SP 800-53 Rev. 4 AT-2, PM-13
		PR.AT-2: Privileged users understand their roles and responsibilities	CIS CSC 5, 17, 18 COBIT 5 APO07.02, DSS05.04, DSS06.03 ISA 62443-2-1:2009 4.3.2.4.2, 4.3.2.4.3 ISO/IEC 27001:2013 A.6.1.1, A.7.2.2 NIST SP 800-53 Rev. 4 AT-3, PM-13
		PR.AT-3: Third-party stakeholders (e.g., suppliers, customers, partners) understand their roles and responsibilities	CIS CSC 17 COBIT 5 APO07.03, APO07.06, APO10.04, APO10.05 ISA 62443-2-1:2009 4.3.2.4.2 ISO/IEC 27001:2013 A.6.1.1, A.7.2.1, A.7.2.2 NIST SP 800-53 Rev. 4 PS-7, SA-9, SA-16
		PR.AT-4: Senior executives understand their roles and responsibilities	CIS CSC 17, 19 COBIT 5 EDM01.01, APO01.02, APO07.03 ISA 62443-2-1:2009 4.3.2.4.2 ISO/IEC 27001:2013 A.6.1.1, A.7.2.2 NIST SP 800-53 Rev. 4 AT-3, PM-13
		PR.AT-5: Physical and cybersecurity personnel understand their roles and responsibilities	CIS CSC 17 COBIT 5 APO07.03 ISA 62443-2-1:2009 4.3.2.4.2 ISO/IEC 27001:2013 A.6.1.1, A.7.2.2

Function	Category	Subcategory	Informative References
			NIST SP 800-53 Rev. 4 AT-3, IR-2, PM-13
	Data Security (PR.DS): Information and records (data) are managed consistent with the organization's risk strategy to protect the confidentiality, integrity, and availability of information.	PR.DS-1: Data-at-rest is protected	CIS CSC 13, 14 COBIT 5 APO01.06, BAI02.01, BAI06.01, DSS04.07, DSS05.03, DSS06.06 ISA 62443-3-3:2013 SR 3.4, SR 4.1 ISO/IEC 27001:2013 A.8.2.3 NIST SP 800-53 Rev. 4 MP-8, SC-12, SC-28
		PR.DS-2: Data-in-transit is protected	CIS CSC 13, 14 COBIT 5 APO01.06, DSS05.02, DSS06.06 ISA 62443-3-3:2013 SR 3.1, SR 3.8, SR 4.1, SR 4.2 ISO/IEC 27001:2013 A.8.2.3, A.13.1.1, A.13.2.1, A.13.2.3, A.14.1.2, A.14.1.3 NIST SP 800-53 Rev. 4 SC-8, SC-11, SC-12
		PR.DS-3: Assets are formally managed throughout removal, transfers, and disposition	CIS CSC 1 COBIT 5 BAI09.03 ISA 62443-2-1:2009 4.3.3.3.9, 4.3.4.4.1 ISA 62443-3-3:2013 SR 4.2 ISO/IEC 27001:2013 A.8.2.3, A.8.3.1, A.8.3.2, A.8.3.3, A.11.2.5, A.11.2.7 NIST SP 800-53 Rev. 4 CM-8, MP-6, PE-16
		PR.DS-4: Adequate capacity to ensure availability is maintained	CIS CSC 1, 2, 13 COBIT 5 APO13.01, BAI04.04 ISA 62443-3-3:2013 SR 7.1, SR 7.2 ISO/IEC 27001:2013 A.12.1.3, A.17.2.1 NIST SP 800-53 Rev. 4 AU-4, CP-2, SC-5
		PR.DS-5: Protections against data leaks are implemented	CIS CSC 13 COBIT 5 APO01.06, DSS05.04, DSS05.07, DSS06.02 ISA 62443-3-3:2013 SR 5.2 ISO/IEC 27001:2013 A.6.1.2, A.7.1.1, A.7.1.2, A.7.3.1, A.8.2.2, A.8.2.3, A.9.1.1, A.9.1.2, A.9.2.3, A.9.4.1, A.9.4.4, A.9.4.5, A.10.1.1, A.11.1.4,

Function	Category	Subcategory	Informative References
			A.11.1.5, A.11.2.1, A.13.1.1, A.13.1.3, A.13.2.1, A.13.2.3, A.13.2.4, A.14.1.2, A.14.1.3 NIST SP 800-53 Rev. 4 AC-4, AC-5, AC-6, PE- 19, PS-3, PS-6, SC-7, SC-8, SC-13, SC-31, SI-4
		PR.DS-6: Integrity checking mechanisms are used to verify software, firmware, and information integrity	CIS CSC 2, 3 COBIT 5 APO01.06, BAI06.01, DSS06.02 ISA 62443-3-3:2013 SR 3.1, SR 3.3, SR 3.4, SR 3.8 ISO/IEC 27001:2013 A.12.2.1, A.12.5.1, A.14.1.2, A.14.1.3, A.14.2.4 NIST SP 800-53 Rev. 4 SC-16, SI-7
		PR.DS-7: The development and testing environment(s) are separate from the production environment	CIS CSC 18, 20 COBIT 5 BAI03.08, BAI07.04 ISO/IEC 27001:2013 A.12.1.4 NIST SP 800-53 Rev. 4 CM-2
		PR.DS-8: Integrity checking mechanisms are used to verify hardware integrity	COBIT 5 BAI03.05 ISA 62443-2-1:2009 4.3.4.4.4 ISO/IEC 27001:2013 A.11.2.4 NIST SP 800-53 Rev. 4 SA-10, SI-7
	Information Protection Processes and Procedures (PR.IP): Security policies (that address purpose, scope, roles, responsibilities, management commitment, and coordination among organizational entities), processes, and procedures are maintained and used to manage protection of information systems	PR.IP-1: A baseline configuration of information technology/industrial control systems is created and maintained incorporating security principles (e.g. concept of least functionality)	CIS CSC 3, 9, 11 COBIT 5 BAI10.01, BAI10.02, BAI10.03, BAI10.05 ISA 62443-2-1:2009 4.3.4.3.2, 4.3.4.3.3 ISA 62443-3-3:2013 SR 7.6 ISO/IEC 27001:2013 A.12.1.2, A.12.5.1, A.12.6.2, A.14.2.2, A.14.2.3, A.14.2.4 NIST SP 800-53 Rev. 4 CM-2, CM-3, CM-4, CM- 5, CM-6, CM-7, CM-9, SA-10
	and assets.	PR.IP-2: A System Development Life Cycle to manage systems is implemented	CIS CSC 18 COBIT 5 APO13.01, BAI03.01, BAI03.02, BAI03.03 ISA 62443-2-1:2009 4.3.4.3.3

Function	Category	Subcategory	Informative References
			ISO/IEC 27001:2013 A.6.1.5, A.14.1.1, A.14.2.1, A.14.2.5 NIST SP 800-53 Rev. 4 PL-8, SA-3, SA-4, SA-8, SA-10, SA-11, SA-12, SA-15, SA-17, SI-12, SI- 13, SI-14, SI-16, SI-17
		PR.IP-3: Configuration change control processes are in place	CIS CSC 3, 11 COBIT 5 BAI01.06, BAI06.01 ISA 62443-2-1:2009 4.3.4.3.2, 4.3.4.3.3 ISA 62443-3-3:2013 SR 7.6 ISO/IEC 27001:2013 A.12.1.2, A.12.5.1, A.12.6.2, A.14.2.2, A.14.2.3, A.14.2.4 NIST SP 800-53 Rev. 4 CM-3, CM-4, SA-10
		PR.IP-4: Backups of information are conducted, maintained, and tested	CIS CSC 10 COBIT 5 APO13.01, DSS01.01, DSS04.07 ISA 62443-2-1:2009 4.3.4.3.9 ISA 62443-3-3:2013 SR 7.3, SR 7.4 ISO/IEC 27001:2013 A.12.3.1, A.17.1.2, A.17.1.3, A.18.1.3 NIST SP 800-53 Rev. 4 CP-4, CP-6, CP-9
		PR.IP-5: Policy and regulations regarding the physical operating environment for organizational assets are met	COBIT 5 DSS01.04, DSS05.05 ISA 62443-2-1:2009 4.3.3.3.1 4.3.3.3.2, 4.3.3.3.3, 4.3.3.3.5, 4.3.3.3.6 ISO/IEC 27001:2013 A.11.1.4, A.11.2.1, A.11.2.2, A.11.2.3 NIST SP 800-53 Rev. 4 PE-10, PE-12, PE-13, PE- 14, PE-15, PE-18
		PR.IP-6: Data is destroyed according to policy	COBIT 5 BAI09.03, DSS05.06 ISA 62443-2-1:2009 4.3.4.4.4 ISA 62443-3-3:2013 SR 4.2 ISO/IEC 27001:2013 A.8.2.3, A.8.3.1, A.8.3.2, A.11.2.7 NIST SP 800-53 Rev. 4 MP-6

Function	Category	Subcategory	Informative References
		PR.IP-7: Protection processes are improved	COBIT 5 APO11.06, APO12.06, DSS04.05 ISA 62443-2-1:2009 4.4.3.1, 4.4.3.2, 4.4.3.3, 4.4.3.4, 4.4.3.5, 4.4.3.6, 4.4.3.7, 4.4.3.8 ISO/IEC 27001:2013 A.16.1.6, Clause 9, Clause 10 NIST SP 800-53 Rev. 4 CA-2, CA-7, CP-2, IR-8, PL-2, PM-6
		PR.IP-8: Effectiveness of protection technologies is shared	COBIT 5 BAI08.04, DSS03.04 ISO/IEC 27001:2013 A.16.1.6 NIST SP 800-53 Rev. 4 AC-21, CA-7, SI-4
		PR.IP-9: Response plans (Incident Response and Business Continuity) and recovery plans (Incident Recovery and Disaster Recovery) are in place and managed	CIS CSC 19 COBIT 5 APO12.06, DSS04.03 ISA 62443-2-1:2009 4.3.2.5.3, 4.3.4.5.1 ISO/IEC 27001:2013 A.16.1.1, A.17.1.1, A.17.1.2, A.17.1.3 NIST SP 800-53 Rev. 4 CP-2, CP-7, CP-12, CP- 13, IR-7, IR-8, IR-9, PE-17
		PR.IP-10: Response and recovery plans are tested	CIS CSC 19, 20 COBIT 5 DSS04.04 ISA 62443-2-1:2009 4.3.2.5.7, 4.3.4.5.11 ISA 62443-3-3:2013 SR 3.3 ISO/IEC 27001:2013 A.17.1.3 NIST SP 800-53 Rev. 4 CP-4, IR-3, PM-14
		PR.IP-11: Cybersecurity is included in human resources practices (e.g., deprovisioning, personnel screening)	CIS CSC 5, 16 COBIT 5 APO07.01, APO07.02, APO07.03, APO07.04, APO07.05 ISA 62443-2-1:2009 4.3.3.2.1, 4.3.3.2.2, 4.3.3.2.3 ISO/IEC 27001:2013 A.7.1.1, A.7.1.2, A.7.2.1, A.7.2.2, A.7.2.3, A.7.3.1, A.8.1.4 NIST SP 800-53 Rev. 4 PS-1, PS-2, PS-3, PS-4, PS-5, PS-6, PS-7, PS-8, SA-21

Function	Category	Subcategory	Informative References
		PR.IP-12: A vulnerability management plan is developed and implemented	CIS CSC 4, 18, 20 COBIT 5 BAI03.10, DSS05.01, DSS05.02 ISO/IEC 27001:2013 A.12.6.1, A.14.2.3, A.16.1.3, A.18.2.2, A.18.2.3 NIST SP 800-53 Rev. 4 RA-3, RA-5, SI-2
	Maintenance (PR.MA): Maintenance and repairs of industrial control and information system components are performed consistent with policies and procedures.	PR.MA-1: Maintenance and repair of organizational assets are performed and logged, with approved and controlled tools	COBIT 5 BAI03.10, BAI09.02, BAI09.03, DSS01.05 ISA 62443-2-1:2009 4.3.3.3.7 ISO/IEC 27001:2013 A.11.1.2, A.11.2.4, A.11.2.5, A.11.2.6 NIST SP 800-53 Rev. 4 MA-2, MA-3, MA-5, MA-6
		PR.MA-2: Remote maintenance of organizational assets is approved, logged, and performed in a manner that prevents unauthorized access	CIS CSC 3, 5 COBIT 5 DSS05.04 ISA 62443-2-1:2009 4.3.3.6.5, 4.3.3.6.6, 4.3.3.6.7, 4.3.3.6.8 ISO/IEC 27001:2013 A.11.2.4, A.15.1.1, A.15.2.1 NIST SP 800-53 Rev. 4 MA-4
	Protective Technology (PR.PT): Technical security solutions are managed to ensure the security and resilience of systems and assets, consistent with related policies, procedures, and agreements.	PR.PT-1: Audit/log records are determined, documented, implemented, and reviewed in accordance with policy	CIS CSC 1, 3, 5, 6, 14, 15, 16 COBIT 5 APO11.04, BAI03.05, DSS05.04, DSS05.07, MEA02.01 ISA 62443-2-1:2009 4.3.3.3.9, 4.3.3.5.8, 4.3.4.4.7, 4.4.2.1, 4.4.2.2, 4.4.2.4 ISA 62443-3-3:2013 SR 2.8, SR 2.9, SR 2.10, SR 2.11, SR 2.12 ISO/IEC 27001:2013 A.12.4.1, A.12.4.2, A.12.4.3, A.12.4.4, A.12.7.1 NIST SP 800-53 Rev. 4 AU Family
		PR.PT-2: Removable media is protected and its use restricted according to policy	CIS CSC 8, 13 COBIT 5 APO13.01, DSS05.02, DSS05.06 ISA 62443-3-3:2013 SR 2.3 ISO/IEC 27001:2013 A.8.2.1, A.8.2.2, A.8.2.3, A.8.3.1, A.8.3.3, A.11.2.9

Function	Category	Subcategory	Informative References
			NIST SP 800-53 Rev. 4 MP-2, MP-3, MP-4, MP-5, MP-7, MP-8
		PR.PT-3: The principle of least functionality is incorporated by configuring systems to provide only essential capabilities	CIS CSC 3, 11, 14 COBIT 5 DSS05.02, DSS05.05, DSS06.06 ISA 62443-2-1:2009 4.3.3.5.1, 4.3.3.5.2, 4.3.3.5.3, 4.3.3.5.4, 4.3.3.5.5, 4.3.3.5.6, 4.3.3.5.7, 4.3.3.5.8, 4.3.3.6.1, 4.3.3.6.2, 4.3.3.6.3, 4.3.3.6.4, 4.3.3.6.5, 4.3.3.6.6, 4.3.3.6.7, 4.3.3.6.8, 4.3.3.6.9, 4.3.3.7.1, 4.3.3.7.2, 4.3.3.7.3, 4.3.3.7.4 ISA 62443-3-3:2013 SR 1.1, SR 1.2, SR 1.3, SR 1.4, SR 1.5, SR 1.6, SR 1.7, SR 1.8, SR 1.9, SR 1.10, SR 1.11, SR 1.12, SR 1.13, SR 2.1, SR 2.2, SR 2.3, SR 2.4, SR 2.5, SR 2.6, SR 2.7 ISO/IEC 27001:2013 A.9.1.2 NIST SP 800-53 Rev. 4 AC-3, CM-7
		PR.PT-4: Communications and control networks are protected	CIS CSC 8, 12, 15 COBIT 5 DSS05.02, APO13.01 ISA 62443-3-3:2013 SR 3.1, SR 3.5, SR 3.8, SR 4.1, SR 4.3, SR 5.1, SR 5.2, SR 5.3, SR 7.1, SR 7.6 ISO/IEC 27001:2013 A.13.1.1, A.13.2.1, A.14.1.3 NIST SP 800-53 Rev. 4 AC-4, AC-17, AC-18, CP-8, SC-7, SC-19, SC-20, SC-21, SC-22, SC-23, SC-24, SC-25, SC-29, SC-32, SC-36, SC-37, SC- 38, SC-39, SC-40, SC-41, SC-43
		PR.PT-5: Mechanisms (e.g., failsafe, load balancing, hot swap) are implemented to achieve resilience requirements in normal and adverse situations	COBIT 5 BAI04.01, BAI04.02, BAI04.03, BAI04.04, BAI04.05, DSS01.05 ISA 62443-2-1:2009 4.3.2.5.2 ISA 62443-3-3:2013 SR 7.1, SR 7.2 ISO/IEC 27001:2013 A.17.1.2, A.17.2.1 NIST SP 800-53 Rev. 4 CP-7, CP-8, CP-11, CP- 13, PL-8, SA-14, SC-6
DETECT (DE)	Anomalies and Events (DE.AE): Anomalous activity is detected	DE.AE-1: A baseline of network operations and expected data flows for	CIS CSC 1, 4, 6, 12, 13, 15, 16 COBIT 5 DSS03.01 ISA 62443-2-1:2009 4.4.3.3

Function	Category	Subcategory	Informative References
	and the potential impact of events is understood.	users and systems is established and managed	ISO/IEC 27001:2013 A.12.1.1, A.12.1.2, A.13.1.1, A.13.1.2 NIST SP 800-53 Rev. 4 AC-4, CA-3, CM-2, SI-4
		DE.AE-2: Detected events are analyzed to understand attack targets and methods	CIS CSC 3, 6, 13, 15 COBIT 5 DSS05.07 ISA 62443-2-1:2009 4.3.4.5.6, 4.3.4.5.7, 4.3.4.5.8 ISA 62443-3-3:2013 SR 2.8, SR 2.9, SR 2.10, SR 2.11, SR 2.12, SR 3.9, SR 6.1, SR 6.2 ISO/IEC 27001:2013 A.12.4.1, A.16.1.1, A.16.1.4 NIST SP 800-53 Rev. 4 AU-6, CA-7, IR-4, SI-4
		DE.AE-3: Event data are collected and correlated from multiple sources and sensors	CIS CSC 1, 3, 4, 5, 6, 7, 8, 11, 12, 13, 14, 15, 16 COBIT 5 BAI08.02 ISA 62443-3-3:2013 SR 6.1 ISO/IEC 27001:2013 A.12.4.1, A.16.1.7 NIST SP 800-53 Rev. 4 AU-6, CA-7, IR-4, IR-5, IR-8, SI-4
		DE.AE-4: Impact of events is determined	CIS CSC 4, 6 COBIT 5 APO12.06, DSS03.01 ISO/IEC 27001:2013 A.16.1.4 NIST SP 800-53 Rev. 4 CP-2, IR-4, RA-3, SI-4
		DE.AE-5: Incident alert thresholds are established	CIS CSC 6, 19 COBIT 5 APO12.06, DSS03.01 ISA 62443-2-1:2009 4.2.3.10 ISO/IEC 27001:2013 A.16.1.4 NIST SP 800-53 Rev. 4 IR-4, IR-5, IR-8
	Security Continuous Monitoring (DE.CM): The information system and assets are monitored to identify cybersecurity events and verify	DE.CM-1: The network is monitored to detect potential cybersecurity events	CIS CSC 1, 7, 8, 12, 13, 15, 16 COBIT 5 DSS01.03, DSS03.05, DSS05.07 ISA 62443-3-3:2013 SR 6.2 NIST SP 800-53 Rev. 4 AC-2, AU-12, CA-7, CM- 3, SC-5, SC-7, SI-4

Function	Category	Subcategory	Informative References
	the effectiveness of protective measures.	DE.CM-2: The physical environment is monitored to detect potential cybersecurity events	COBIT 5 DSS01.04, DSS01.05 ISA 62443-2-1:2009 4.3.3.3.8 ISO/IEC 27001:2013 A.11.1.1, A.11.1.2 NIST SP 800-53 Rev. 4 CA-7, PE-3, PE-6, PE-20
		DE.CM-3: Personnel activity is monitored to detect potential cybersecurity events	CIS CSC 5, 7, 14, 16 COBIT 5 DSS05.07 ISA 62443-3-3:2013 SR 6.2 ISO/IEC 27001:2013 A.12.4.1, A.12.4.3 NIST SP 800-53 Rev. 4 AC-2, AU-12, AU-13, CA-7, CM-10, CM-11
		DE.CM-4: Malicious code is detected	CIS CSC 4, 7, 8, 12 COBIT 5 DSS05.01 ISA 62443-2-1:2009 4.3.4.3.8 ISA 62443-3-3:2013 SR 3.2 ISO/IEC 27001:2013 A.12.2.1 NIST SP 800-53 Rev. 4 SI-3, SI-8
		DE.CM-5: Unauthorized mobile code is detected	CIS CSC 7, 8 COBIT 5 DSS05.01 ISA 62443-3-3:2013 SR 2.4 ISO/IEC 27001:2013 A.12.5.1, A.12.6.2 NIST SP 800-53 Rev. 4 SC-18, SI-4, SC-44
		DE.CM-6: External service provider activity is monitored to detect potential cybersecurity events	COBIT 5 APO07.06, APO10.05 ISO/IEC 27001:2013 A.14.2.7, A.15.2.1 NIST SP 800-53 Rev. 4 CA-7, PS-7, SA-4, SA-9, SI-4
		DE.CM-7: Monitoring for unauthorized personnel, connections, devices, and software is performed	CIS CSC 1, 2, 3, 5, 9, 12, 13, 15, 16 COBIT 5 DSS05.02, DSS05.05 ISO/IEC 27001:2013 A.12.4.1, A.14.2.7, A.15.2.1 NIST SP 800-53 Rev. 4 AU-12, CA-7, CM-3, CM-8, PE-3, PE-6, PE-20, SI-4
		DE.CM-8: Vulnerability scans are performed	CIS CSC 4, 20

Function	Category	Subcategory	Informative References
			COBIT 5 BAI03.10, DSS05.01 ISA 62443-2-1:2009 4.2.3.1, 4.2.3.7 ISO/IEC 27001:2013 A.12.6.1 NIST SP 800-53 Rev. 4 RA-5
	Detection Processes (DE.DP): Detection processes and procedures are maintained and tested to ensure awareness of anomalous events.	DE.DP-1: Roles and responsibilities for detection are well defined to ensure accountability	CIS CSC 19 COBIT 5 APO01.02, DSS05.01, DSS06.03 ISA 62443-2-1:2009 4.4.3.1 ISO/IEC 27001:2013 A.6.1.1, A.7.2.2 NIST SP 800-53 Rev. 4 CA-2, CA-7, PM-14
		DE.DP-2: Detection activities comply with all applicable requirements	COBIT 5 DSS06.01, MEA03.03, MEA03.04 ISA 62443-2-1:2009 4.4.3.2 ISO/IEC 27001:2013 A.18.1.4, A.18.2.2, A.18.2.3 NIST SP 800-53 Rev. 4 AC-25, CA-2, CA-7, SA- 18, SI-4, PM-14
		DE.DP-3: Detection processes are tested	COBIT 5 APO13.02, DSS05.02 ISA 62443-2-1:2009 4.4.3.2 ISA 62443-3-3:2013 SR 3.3 ISO/IEC 27001:2013 A.14.2.8 NIST SP 800-53 Rev. 4 CA-2, CA-7, PE-3, SI-3, SI-4, PM-14
		DE.DP-4: Event detection information is communicated	CIS CSC 19 COBIT 5 APO08.04, APO12.06, DSS02.05 ISA 62443-2-1:2009 4.3.4.5.9 ISA 62443-3-3:2013 SR 6.1 ISO/IEC 27001:2013 A.16.1.2, A.16.1.3 NIST SP 800-53 Rev. 4 AU-6, CA-2, CA-7, RA- 5, SI-4
		DE.DP-5: Detection processes are continuously improved	COBIT 5 APO11.06, APO12.06, DSS04.05 ISA 62443-2-1:2009 4.4.3.4 ISO/IEC 27001:2013 A.16.1.6 NIST SP 800-53 Rev. 4, CA-2, CA-7, PL-2, RA- 5, SI-4, PM-14

Function	Category	Subcategory	Informative References
RESPOND (RS)	Response Planning (RS.RP): Response processes and procedures are executed and maintained, to ensure response to detected cybersecurity incidents.	RS.RP-1: Response plan is executed during or after an incident	CIS CSC 19 COBIT 5 APO12.06, BAI01.10 ISA 62443-2-1:2009 4.3.4.5.1 ISO/IEC 27001:2013 A.16.1.5 NIST SP 800-53 Rev. 4 CP-2, CP-10, IR-4, IR-8
	Communications (RS.CO): Response activities are coordinated with internal and external stakeholders (e.g. external support from law enforcement agencies).	RS.CO-1: Personnel know their roles and order of operations when a response is needed	CIS CSC 19 COBIT 5 EDM03.02, APO01.02, APO12.03 ISA 62443-2-1:2009 4.3.4.5.2, 4.3.4.5.3, 4.3.4.5.4 ISO/IEC 27001:2013 A.6.1.1, A.7.2.2, A.16.1.1 NIST SP 800-53 Rev. 4 CP-2, CP-3, IR-3, IR-8
	emoreement ageneies).	RS.CO-2: Incidents are reported consistent with established criteria	CIS CSC 19 COBIT 5 DSS01.03 ISA 62443-2-1:2009 4.3.4.5.5 ISO/IEC 27001:2013 A.6.1.3, A.16.1.2 NIST SP 800-53 Rev. 4 AU-6, IR-6, IR-8
		RS.CO-3: Information is shared consistent with response plans	CIS CSC 19 COBIT 5 DSS03.04 ISA 62443-2-1:2009 4.3.4.5.2 ISO/IEC 27001:2013 A.16.1.2, Clause 7.4, Clause 16.1.2 NIST SP 800-53 Rev. 4 CA-2, CA-7, CP-2, IR-4, IR-8, PE-6, RA-5, SI-4
		RS.CO-4: Coordination with stakeholders occurs consistent with response plans	CIS CSC 19 COBIT 5 DSS03.04 ISA 62443-2-1:2009 4.3.4.5.5 ISO/IEC 27001:2013 Clause 7.4 NIST SP 800-53 Rev. 4 CP-2, IR-4, IR-8
		RS.CO-5: Voluntary information sharing occurs with external stakeholders to achieve broader cybersecurity situational awareness	CIS CSC 19 COBIT 5 BAI08.04 ISO/IEC 27001:2013 A.6.1.4 NIST SP 800-53 Rev. 4 SI-5, PM-15

Function	Category	Subcategory	Informative References
conducted to ensure ef	Analysis (RS.AN): Analysis is conducted to ensure effective response and support recovery activities.	RS.AN-1: Notifications from detection systems are investigated	CIS CSC 4, 6, 8, 19 COBIT 5 DSS02.04, DSS02.07 ISA 62443-2-1:2009 4.3.4.5.6, 4.3.4.5.7, 4.3.4.5.8 ISA 62443-3-3:2013 SR 6.1 ISO/IEC 27001:2013 A.12.4.1, A.12.4.3, A.16.1.5 NIST SP 800-53 Rev. 4 AU-6, CA-7, IR-4, IR-5, PE-6, SI-4
		RS.AN-2: The impact of the incident is understood	COBIT 5 DSS02.02 ISA 62443-2-1:2009 4.3.4.5.6, 4.3.4.5.7, 4.3.4.5.8 ISO/IEC 27001:2013 A.16.1.4, A.16.1.6 NIST SP 800-53 Rev. 4 CP-2, IR-4
		RS.AN-3: Forensics are performed	COBIT 5 APO12.06, DSS03.02, DSS05.07 ISA 62443-3-3:2013 SR 2.8, SR 2.9, SR 2.10, SR 2.11, SR 2.12, SR 3.9, SR 6.1 ISO/IEC 27001:2013 A.16.1.7 NIST SP 800-53 Rev. 4 AU-7, IR-4
		RS.AN-4: Incidents are categorized consistent with response plans	CIS CSC 19 COBIT 5 DSS02.02 ISA 62443-2-1:2009 4.3.4.5.6 ISO/IEC 27001:2013 A.16.1.4 NIST SP 800-53 Rev. 4 CP-2, IR-4, IR-5, IR-8
		RS.AN-5: Processes are established to receive, analyze and respond to vulnerabilities disclosed to the organization from internal and external sources (e.g. internal testing, security bulletins, or security researchers)	CIS CSC 4, 19 COBIT 5 EDM03.02, DSS05.07 NIST SP 800-53 Rev. 4 SI-5, PM-15
	Mitigation (RS.MI): Activities are performed to prevent expansion of an event, mitigate its effects, and resolve the incident.	RS.MI-1: Incidents are contained	CIS CSC 19 COBIT 5 APO12.06 ISA 62443-2-1:2009 4.3.4.5.6 ISA 62443-3-3:2013 SR 5.1, SR 5.2, SR 5.4 ISO/IEC 27001:2013 A.12.2.1, A.16.1.5

Function	Category	Subcategory	Informative References
			NIST SP 800-53 Rev. 4 IR-4
		RS.MI-2: Incidents are mitigated	CIS CSC 4, 19 COBIT 5 APO12.06
			ISA 62443-2-1:2009 4.3.4.5.6, 4.3.4.5.10 ISO/IEC 27001:2013 A.12.2.1, A.16.1.5
			NIST SP 800-53 Rev. 4 IR-4
		RS.MI-3: Newly identified vulnerabilities are mitigated or documented as accepted risks	CIS CSC 4 COBIT 5 APO12.06 ISO/IEC 27001:2013 A.12.6.1 NIST SP 800-53 Rev. 4 CA-7, RA-3, RA-5
	Improvements (RS.IM): Organizational response activities are improved by incorporating lessons learned from current and previous detection/response activities.	RS.IM-1: Response plans incorporate lessons learned	COBIT 5 BAI01.13 ISA 62443-2-1:2009 4.3.4.5.10, 4.4.3.4 ISO/IEC 27001:2013 A.16.1.6, Clause 10 NIST SP 800-53 Rev. 4 CP-2, IR-4, IR-8
		RS.IM-2: Response strategies are updated	COBIT 5 BAI01.13, DSS04.08 ISO/IEC 27001:2013 A.16.1.6, Clause 10 NIST SP 800-53 Rev. 4 CP-2, IR-4, IR-8
RECOVER (RC)	Recovery Planning (RC.RP): Recovery processes and procedures are executed and maintained to ensure restoration of systems or assets affected by cybersecurity incidents.	RC.RP-1: Recovery plan is executed during or after a cybersecurity incident	CIS CSC 10 COBIT 5 APO12.06, DSS02.05, DSS03.04 ISO/IEC 27001:2013 A.16.1.5 NIST SP 800-53 Rev. 4 CP-10, IR-4, IR-8
	Improvements (RC.IM): Recovery planning and processes are improved by incorporating lessons learned into future activities.	RC.IM-1: Recovery plans incorporate lessons learned	COBIT 5 APO12.06, BAI05.07, DSS04.08 ISA 62443-2-1:2009 4.4.3.4 ISO/IEC 27001:2013 A.16.1.6, Clause 10 NIST SP 800-53 Rev. 4 CP-2, IR-4, IR-8
	activities.	RC.IM-2: Recovery strategies are updated	COBIT 5 APO12.06, BAI07.08 ISO/IEC 27001:2013 A.16.1.6, Clause 10 NIST SP 800-53 Rev. 4 CP-2, IR-4, IR-8

Function	Category	Subcategory	Informative References
	Communications (RC.CO): Restoration activities are coordinated with internal and external parties (e.g. coordinating centers, Internet Service Providers, owners of attacking systems, victims, other CSIRTs, and vendors).	RC.CO-1: Public relations are managed	COBIT 5 EDM03.02 ISO/IEC 27001:2013 A.6.1.4, Clause 7.4
		RC.CO-2: Reputation is repaired after an incident	COBIT 5 MEA03.02 ISO/IEC 27001:2013 Clause 7.4
		RC.CO-3: Recovery activities are communicated to internal and external stakeholders as well as executive and management teams	COBIT 5 APO12.06 ISO/IEC 27001:2013 Clause 7.4 NIST SP 800-53 Rev. 4 CP-2, IR-4

Information regarding Informative References described in Appendix A may be found at the following locations:

- Control Objectives for Information and Related Technology (COBIT): <u>http://www.isaca.org/COBIT/Pages/default.aspx</u>
- CIS Critical Security Controls for Effective Cyber Defense (CIS Controls): <u>https://www.cisecurity.org</u>
- American National Standards Institute/International Society of Automation (ANSI/ISA)-62443-2-1 (99.02.01)-2009, Security for Industrial Automation and Control Systems: Establishing an Industrial Automation and Control Systems Security Program: https://www.isa.org/templates/one-column.aspx?pageid=111294&productId=116731
- ANSI/ISA-62443-3-3 (99.03.03)-2013, Security for Industrial Automation and Control Systems: System Security Requirements and Security Levels: https://www.isa.org/templates/one-column.aspx?pageid=111294&productId=116785
- ISO/IEC 27001, Information technology -- Security techniques -- Information security management systems -- Requirements: https://www.iso.org/standard/54534.html
- NIST SP 800-53 Rev. 4 NIST Special Publication 800-53 Revision 4, *Security and Privacy Controls for Federal Information Systems and Organizations*, April 2013 (including updates as of January 22, 2015). <u>https://doi.org/10.6028/NIST.SP.800-53r4</u>. Informative References are only mapped to the control level, though any control enhancement might be found useful in achieving a subcategory outcome.

Mappings between the Framework Core Subcategories and the specified sections in the Informative References are not intended to definitively determine whether the specified sections in the Informative References provide the desired Subcategory outcome.

Informative References are not exhaustive, in that not every element (e.g., control, requirement) of a given Informative Reference is mapped to Framework Core Subcategories.

Appendix B: Glossary

This appendix defines selected terms used in the publication.

Table 3: Framework Glossary

-	
Buyer	The people or organizations that consume a given product or service.
Category	The subdivision of a Function into groups of cybersecurity outcomes, closely tied to programmatic needs and particular activities. Examples of Categories include "Asset Management," "Identity Management and Access Control," and "Detection Processes."
Critical Infrastructure	Systems and assets, whether physical or virtual, so vital to the United States that the incapacity or destruction of such systems and assets would have a debilitating impact on cybersecurity, national economic security, national public health or safety, or any combination of those matters.
Cybersecurity	The process of protecting information by preventing, detecting, and responding to attacks.
Cybersecurity Event	A cybersecurity change that may have an impact on organizational operations (including mission, capabilities, or reputation).
Cybersecurity Incident	A cybersecurity event that has been determined to have an impact on the organization prompting the need for response and recovery.
Detect (function)	Develop and implement the appropriate activities to identify the occurrence of a cybersecurity event.
Framework	A risk-based approach to reducing cybersecurity risk composed of three parts: the Framework Core, the Framework Profile, and the Framework Implementation Tiers. Also known as the "Cybersecurity Framework."
Framework Core	A set of cybersecurity activities and references that are common across critical infrastructure sectors and are organized around particular outcomes. The Framework Core comprises four types of elements: Functions, Categories, Subcategories, and Informative References.
Framework Implementation Tier	A lens through which to view the characteristics of an organization's approach to risk—how an organization views cybersecurity risk and the processes in place to manage that risk.

Framework Profile	A representation of the outcomes that a particular system or organization has selected from the Framework Categories and Subcategories.
Function	One of the main components of the Framework. Functions provide the highest level of structure for organizing basic cybersecurity activities into Categories and Subcategories. The five functions are Identify, Protect, Detect, Respond, and Recover.
Identify (function)	Develop the organizational understanding to manage cybersecurity risk to systems, assets, data, and capabilities.
Informative Reference	A specific section of standards, guidelines, and practices common among critical infrastructure sectors that illustrates a method to achieve the outcomes associated with each Subcategory. An example of an Informative Reference is ISO/IEC 27001 Control A.10.8.3, which supports the "Data-in-transit is protected" Subcategory of the "Data Security" Category in the "Protect" function.
Mobile Code	A program (e.g., script, macro, or other portable instruction) that can be shipped unchanged to a heterogeneous collection of platforms and executed with identical semantics.
Protect (function)	Develop and implement the appropriate safeguards to ensure delivery of critical infrastructure services.
Privileged User	A user that is authorized (and, therefore, trusted) to perform security- relevant functions that ordinary users are not authorized to perform.
Recover (function)	Develop and implement the appropriate activities to maintain plans for resilience and to restore any capabilities or services that were impaired due to a cybersecurity event.
Respond (function)	Develop and implement the appropriate activities to take action regarding a detected cybersecurity event.
Risk	A measure of the extent to which an entity is threatened by a potential circumstance or event, and typically a function of: (i) the adverse impacts that would arise if the circumstance or event occurs; and (ii) the likelihood of occurrence.
Risk Management	The process of identifying, assessing, and responding to risk.
Subcategory	The subdivision of a Category into specific outcomes of technical and/or management activities. Examples of Subcategories include "External information systems are catalogued," "Data-at-rest is protected," and "Notifications from detection systems are investigated."

Supplier	Product and service providers used for an organization's internal purposes (e.g., IT infrastructure) or integrated into the products of services provided to that organization's Buyers.
Taxonomy	A scheme of classification.

Appendix C: Acronyms

This appendix defines selected acronyms used in the publication.

ANSI	American National Standards Institute
CEA	Cybersecurity Enhancement Act of 2014
CIS	Center for Internet Security
COBIT	Control Objectives for Information and Related Technology
CPS	Cyber-Physical Systems
CSC	Critical Security Control
DHS	Department of Homeland Security
EO	Executive Order
ICS	Industrial Control Systems
IEC	International Electrotechnical Commission
ІоТ	Internet of Things
IR	Interagency Report
ISA	International Society of Automation
ISAC	Information Sharing and Analysis Center
ISAO	Information Sharing and Analysis Organization
ISO	International Organization for Standardization
IT	Information Technology
NIST	National Institute of Standards and Technology
ОТ	Operational Technology
PII	Personally Identifiable Information
RFI	Request for Information
RMP	Risk Management Process
SCRM	Supply Chain Risk Management
SP	Special Publication



This document is from the holdings of: The National Security Archive Suite 701, Gelman Library, The George Washington University 2130 H Street, NW, Washington, D.C., 20037 Phone: 202/994-7000, Fax: 202/994-7005, nsarchiv@gwu.edu